

# KOBELCO

## SK380XD<sup>LC</sup>

SK380XDLC-10

■ **Bucket Capacity :**

1.40 - 1.80m<sup>3</sup> (ISO heaped)

■ **Engine Power :**

200KW / 2,100 min<sup>-1</sup> (ISO 14396)

■ **Operating Weight :**

37,800 kg



***We Save You Fuel***  
Achieving a Low-Carbon Society



# Power Meets Efficiency

In line with KOBELCO's concept of earth-friendly construction machinery that will work long and hard on any site on the planet, the rugged machine body is newly designed, and comprehensive reinforcement makes the attachment more robust.

It all adds up to KOBELCO's toughest ever mining excavator. The latest hydraulics technology delivers both high-powered output and lower fuel consumption.

As the 10th generation model of KOBELCO's SK series, the SK380XDLC meets the needs of the most punishing mining sites with a performance that simply astounds.







Increase in  
productivity  
means  
"Power"

**24%\***  
Higher fuel  
saving means  
"Efficiency"

\*in Eco-mode compared to S-mode on the SK330-8



# Even stronger attachment

## Reinforced arm exhibits strength

### Thick steel plate **NEW**



Arm top


Thickness of steel plate has been increased in preference to adding reinforcing plates.



Arm foot

Base plate thickness has been increased.

### Modified Foot Boss Shape **NEW**

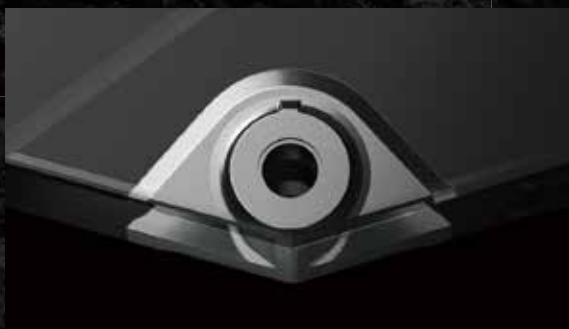


The arm foot boss shape has been modified and improved to distribute stress, delivering more strength for tasks like digging next to a wall.



### Rock Guards

Specially designed long, solid rock guard installed to prevent damage to arm.



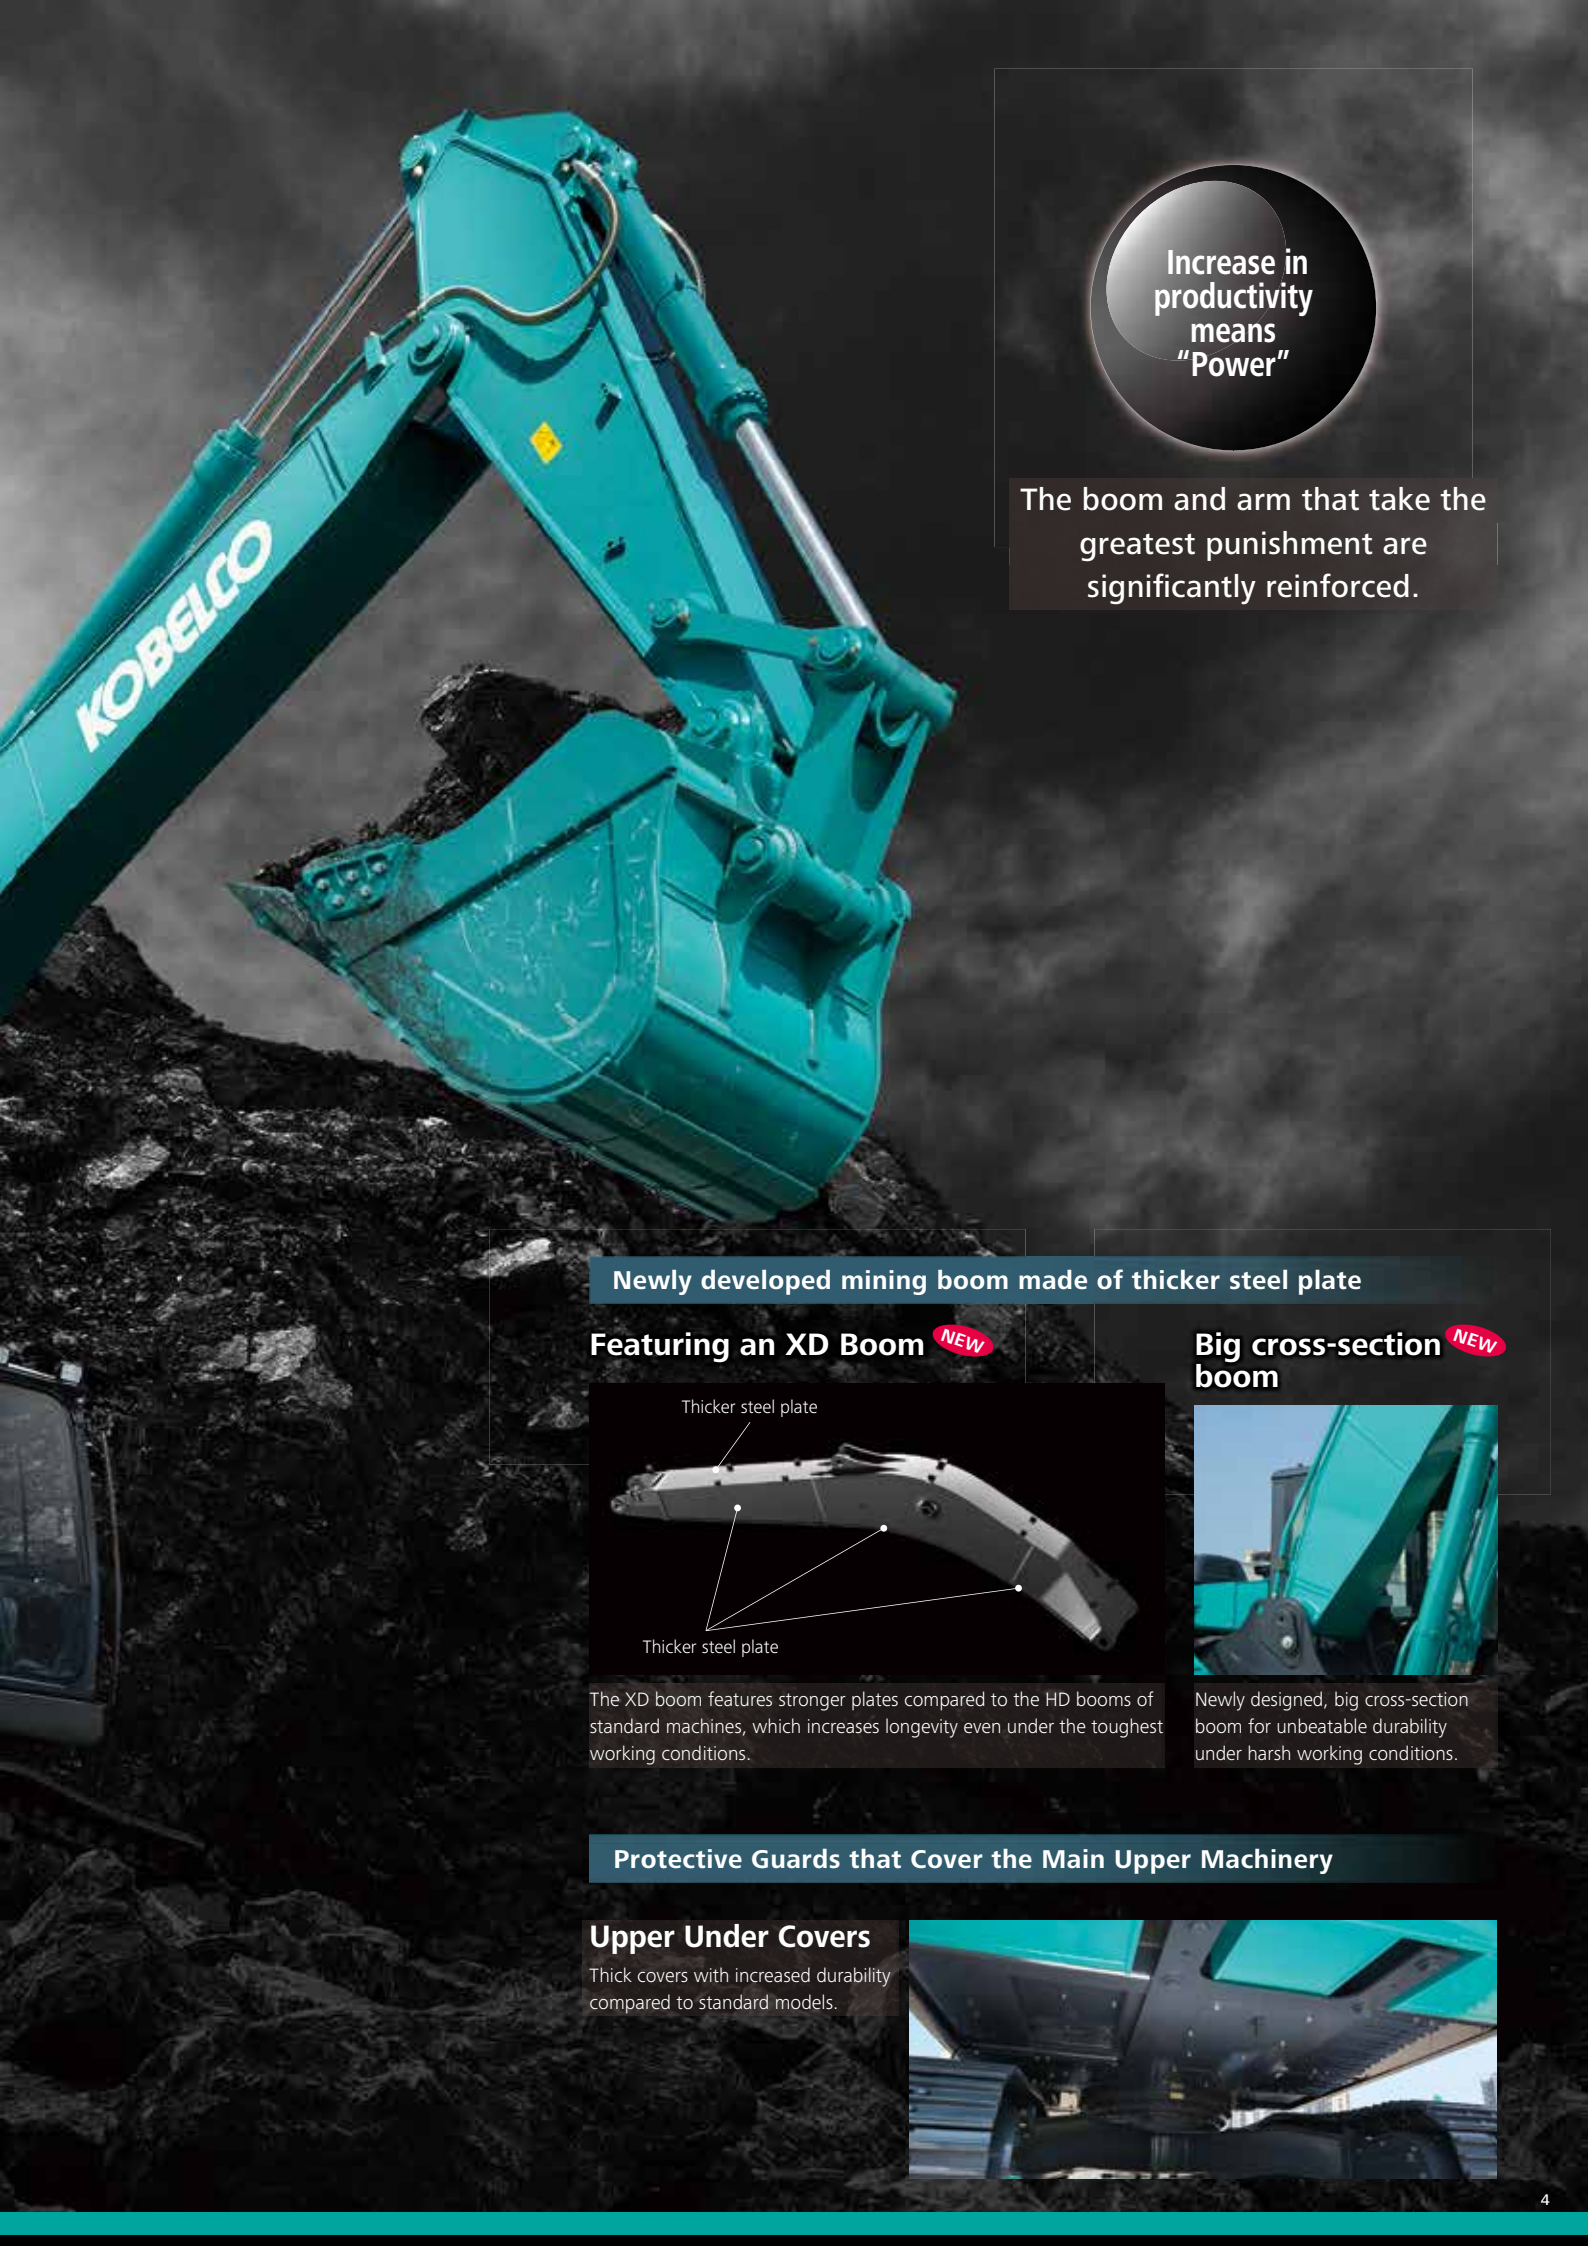


Increase in  
productivity  
means  
"Power"

The boom and arm that take the  
greatest punishment are  
significantly reinforced.

Newly developed mining boom made of thicker steel plate

Featuring an XD Boom **NEW**

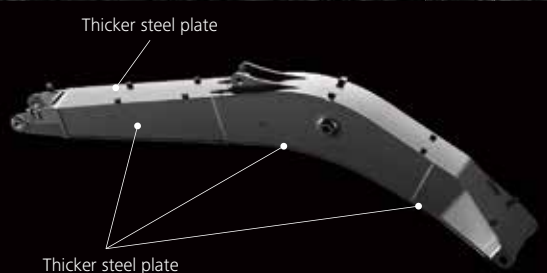

The XD boom features stronger plates compared to the HD booms of standard machines, which increases longevity even under the toughest working conditions.

Big cross-section boom **NEW**



Newly designed, big cross-section boom for unbeatable durability under harsh working conditions.

Protective Guards that Cover the Main Upper Machinery

Upper Under Covers

Thick covers with increased durability compared to standard models.





# Increase in productivity means “Power”

Powerful travel system for easy transit over loose stones, and highly reliable filtration system ensure higher machine performance.

## Crawlers Built for Unbeatable Durability

### Reinforced Guide Frame



Reinforced guide frame prevents deformation caused by impact or encroaching of loose stones.

### Track Guides



Large, reinforced track guides are installed in three locations.

### Double-support outer flange upper rollers



### Lower Under Cover



Hydraulic piping and equipment protected against damage from rubble and stony ground.

### Track Links



The size and durability of the track link are increased compared to standard models.

### Thicker steel plate for shoes



Reinforced HD shoes of thick steel plate to master rough, stony ground.

### Reinforced Travel Motor Cover



Rear of travel motor cover is reinforced.




## Improved Filtration System Reliability

Clean, contaminant-free fuel and hydraulic fluid are essential to stable performance.

The improved filtration systems reduce the risk of mechanical trouble and enhance longevity and durability.

### Fuel Filter NEW

The pre-filter with built-in water separator has 1.8 times more filter area compared to the previous models and with a new final stage maintenance free fuel filter to maximize filtering performance.

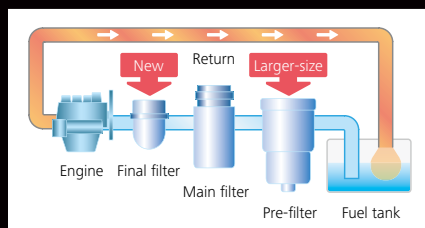


### Hydraulic Fluid Filter NEW

Recognized as the best in the industry, our Premium-fine filter separates out even the smallest particles. New cover prevents contamination when changing filters.



### Metal Mesh Cover Air Cleaner NEW


Metal mesh cover ensures strength and durability.

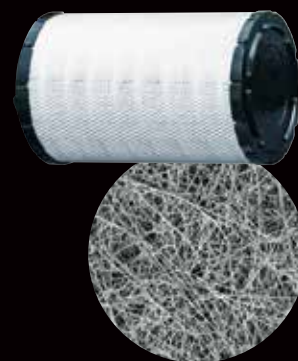

Enlarged filter image

### Hydraulic Fluid Filter Clog Detector NEW

Hydraulic tank pressure sensor monitors the pressure difference between the return line and tank inside pressure to determine the degree of clogging. If the difference exceeds a predetermined level, a warning appears on the multi-display, so any contamination can be trapped by the filter and replaced before it reaches the hydraulic fluid in the tank.

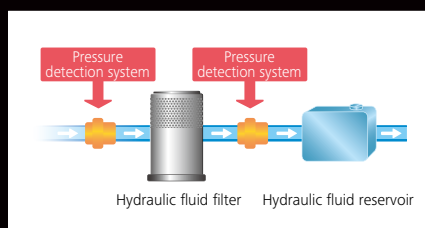



# Evolution Continues, with Improved Fuel Efficiency.

**24%\***  
Higher fuel  
saving means  
"Efficiency"


The new arm interflow system more efficiently controls hydraulic fluid flow, and significant reduction of in-line resistance and pressure loss boosts fuel efficiency by about 24%\*.

\*In Eco-mode compared to S-mode on the SK330-8

## Hydraulic System: Revolutionary Technology Saves Fuel

### Arm Interflow System **NEW**

When lowering the boom, this system uses the downward force generated by the boom's weight to push fluid to the shovel arm. This greatly reduces the need to apply power from outside the system.

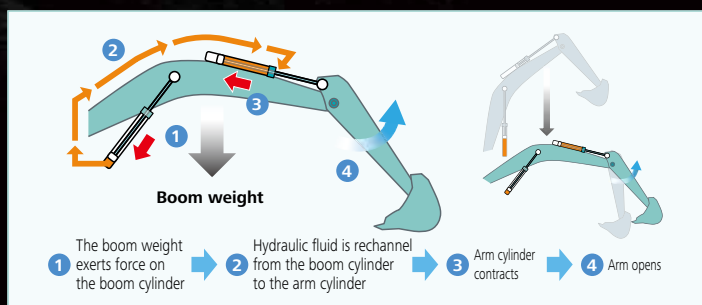

## Energy saving system saves fuel further

### Fuel efficient work mode ECO mode **NEW**

The fuel-saving ECO mode is newly provided to the work mode, selectable according to a desired operation. Fuel consumption can be greatly reduced.



- E** Used to reduce fuel consumption for small workloads  
**ECO-mode, 24% decrease**  
(compared to S-mode on the SK330-8)
- H** Used to prioritize the amount of work done  
**H mode, 16% decrease**  
(compared to S-mode on the SK330-8)
- S** Used to strike a balance between workloads and fuel efficiency  
**S mode, 19% decrease**  
(compared to S-mode on the SK330-8)





**Get More Done Faster**

## Standard 3.3 m arm (reinforced for rocks)

### ■ Max. Bucket Digging Force

Normal: **229kN**  
With power boost: **252kN**

### ■ Max. Arm crowding Force

Normal: **165kN**  
With power boost: **182kN**

### ■ Max digging reach:

**11,260 mm**

### ■ Max digging depth:


**7,560 mm**

### ■ Max vertical digging depth:

**6,480 mm**

## Piping for Breaker

Piping for breaker is fitted as standard.

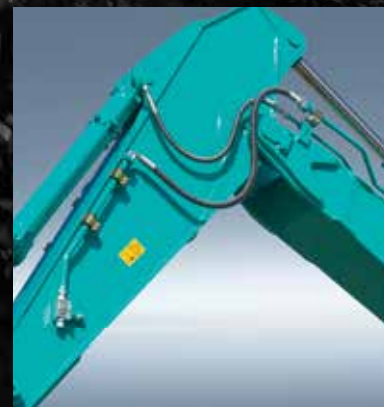

## Top Class Traveling Force

Powerful traveling force and drawbar pulling force deliver plenty of speed when climbing slopes or negotiating bad roads, and the agility to change direction swiftly and smoothly.

■ Drawbar Pulling Force: **331kN**



# Comfortable Cab Is Now Safer than Ever.

A work environment that is quieter and more comfortable. A cab that puts the operator first is key to improved safety.

## Large cab **NEW**

4 % larger than the previous cab capacity. Relaxing environment allows work to be performed in comfort.

## Air Conditioner **NEW** Louvers behind the Seat



The large air-conditioner has louvers on the back pillars that blow from behind and to the right and left of the operator's seat. They can be adjusted to put a direct flow of cool/warm air on the operator, which means a more comfortable operating environment.

## Super-Airtight Cab **NEW**




The high level of air-tightness keeps dust out of the cab.

## Low Vibration **NEW**

Coil springs absorb small vibrations, and high suspension mounts filled with silicone oil reduce heavy vibration. The long stroke achieved by this system provides excellent protection from vibration.

Twice the stroke of a conventional mount



## Multi-Display in Color **NEW**


Brilliant colors and graphic displays are easy to recognize on the LCD multi-display in the console. The display shows fuel consumption, maintenance intervals, and more.



**MAINTENANCE**

ITEM	INTERVAL	REMAINING TIME	EXCHANGE DAY
ENGINE OIL	250	248	---
FUEL FILTER	500	496	---
HYD. FILTER	1000	996	---
HYD. OIL	2000	1996	---

Maintenance



- 1 Analog gauge provides an intuitive reading of fuel level and engine water temperature
- 2 Green indicator light shows low fuel consumption during operation
- 3 Fuel consumption/Switch indicator for rear camera images
- 4 Digging mode switch
- 5 Monitor display switch

## One-Touch Attachment Mode Switch

A simple touch of a button, switches the hydraulic circuit and flow amount to match attachment changes. Icons help the operator to confirm the proper configuration at a glance.



## Comfort

### Broad View Liberates the Operator NEW



The front window features one large piece of glass without a center pillar on the right side for a wide, unobstructed view.

### Large Cab Is Easy to Get in and Out of NEW



The expanded cab provides plenty of room for a large door, more headroom and smoother entry and exit.

### More Comfortable Seat Means Higher Productivity



Vibration absorbing suspension seat



Seat recliner can be pushed back flat




Double slides allow adjustment for optimum comfort

### A Light Touch on the Lever Means Smoother, Less Tiring Work NEW




It takes 38% less effort to work the operation lever, which reduces fatigue over long working hours or continued operations.

### Interior Equipment Adds to Comfort and Convenience



24V outlet



Spacious storage tray



Large cup holder

## Safety

### ROPS Cab NEW


ROPS (Roll-Over-Protective Structure)-compliant cab clears ISO standards (ISO-12117-2: 2008) and ensures greater safety for the operator should the machine tip over.



### Wide view during operations High Visibility for Safety



Greater safety assured by rearview mirrors on left and right.



Hammer for emergency exit



# Efficient Maintenance Keeps the Machine in Peak Operating Condition.



Examples of displaying maintenance information

## Machine Information Display Function

- Displays only the maintenance information that's needed, when it's needed
- Self-diagnostic function provides early-warning detection and display of electrical system malfunctions
- Service-diagnostic function makes it easier to check the status of the machine
- Record function of previous breakdowns including irregular and transient malfunction

## Easy, On-the-Spot Maintenance

There is ample space in the engine compartment for a mechanic to do maintenance work inside. The distance between steps is lower so entry and exit is easier. And the mechanic can work in comfort, without contortions or unnatural body positions. Finally, the hood is lighter and easier to raise and lower.



Generous space for maintenance work



Step/Hand rail

## Maintenance Work, Daily Checks, Etc., Can Be Done from Ground Level

The layout allows for easy access from the ground for many daily checks and regular maintenance tasks.




Double-element air cleaner



Left side

Simple layout for easy access to radiator and cooling system elements.




Fuel filter with built-in water-separator/Fuel filter



Right side

- 1 Fuel filter
- 2 Fuel filter with built-in water-separator
- 3 Engine oil filter

## Easy Cleaning



Crawler frame

Special crawler frame design for easy mud removal cleaning.




Detachable two-piece floor mat

Detachable two-piece floor mat with handles for easy removal. A floor drain is located under floor mat.



Floor mat with raised edges

Floor mat's raised edges help keep the cab floor free of mud, simplify cleaning.



Engine oil pan

Engine oil pan equipped with drain valve.

## More Efficient Maintenance Inside the Cab

Internal and external air conditioner filters can be easily removed without tools for cleaning.



Air conditioner filters





## Engine

Model	HINO J08E
Type	Direct injection, water-cooled, 4-cycle, 6-cylinder diesel engine with intercooler turbo-charger
No. of cylinders	6
Bore and stroke	112 mm X 130 mm
Displacement	7.684 L
Rated power output	188 kW/2,100 min <sup>-1</sup> (ISO 9249) 200 kW/2,100 min <sup>-1</sup> (ISO 14396)
Max. torque	969 N•m/1,600 min <sup>-1</sup> (ISO 9249) 998 N•m/1,600 min <sup>-1</sup> (ISO 14396)



## Hydraulic System

Pump	
Type	Two Variable displacement piston pumps + one gear pump
Max. discharge flow	2 x 294 L/min, 1 x 21 L/min
Relief valve setting	
Boom, arm and bucket	34.3 MPa {350 kgf/cm <sup>2</sup> }
Power Boost	37.8 MPa {385 kgf/cm <sup>2</sup> }
Travel circuit	34.3 MPa {350 kgf/cm <sup>2</sup> }
Swing circuit	29.0 MPa {296 kgf/cm <sup>2</sup> }
Control circuit	5.0 MPa {50 kgf/cm <sup>2</sup> }
Pilot control pump	Gear type
Main control valves	8-spool
Oil cooler	Air cooled type



## Swing System

Swing motor	Axial-piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in neutral position
Parking brake	Wet multiple plate
Swing speed	10 min <sup>-1</sup> {rpm}



## Attachments

Backhoe bucket and arm combination

Bucket capacity	ISO heaped	m <sup>3</sup>	1.4	1.6	1.8
	ISO struck	m <sup>3</sup>	1.0	1.2	1.4
Opening width	With side cutters	mm	1,460	1,470	1,670
	Without side cutters	mm	1,250	1,390	1,640
No. of bucket teeth			5	5	5
Bucket weight		kg	1,600	1,810	1,830
2.60m Short arm			○	○	△
3.30m Standard arm			○	△	△

○ Recommended △ Loading only



## Travel System

Travel motors	Variable displacement piston pump
Travel brakes	Hydraulic
Parking brakes	Wet multiple plate
Travel shoes	48 each side
Travel speed	5.6/3.3 km/h
Drawbar pulling force	331 kN (ISO 7464)
Gradeability	70 % {35°}
Ground clearance	500mm



## Cab & Control

### Cab

All-weather, sound-suppressed steel cab mounted on the high suspension mounts filled with silicone oil and equipped with a heavy, insulated floor mat.

### Control

Two hand levers and two foot pedals for travel

Two hand levers for excavating and swing

Electric rotary-type engine throttle



## Boom, Arm & Bucket

Boom cylinders	140 mm x 1,550 mm
Arm cylinder	170 mm x 1,788 mm
Bucket cylinder	150 mm x 1,193 mm



## Refilling Capacities & Lubrications

Fuel tank	503 L
Cooling system	35 L
Engine oil	28.5 L
Travel reduction gear	2 x 8.0 L
Swing reduction gear	7 L
Hydraulic oil tank	245 L tank oil level
	410 L hydraulic system





## Working Ranges

Unit: m


Boom	Arm	6.50m	
		Short 2.6 m	Standard 3.3 m
Range			
a- Max. digging reach		10.61	11.26
b- Max. digging reach at ground level		10.4	11.06
c- Max. digging depth		6.84	7.56
d- Max. digging height		10.23	10.54
e- Max. dumping clearance		7.07	7.37
f- Min. dumping clearance		3.34	2.62
g- Max. vertical wall digging depth		5.70	6.48
h- Min. swing radius		4.46	4.31
i- Horizontal digging stroke at ground level		4.21	5.82
j- Digging depth for 2.4 m (8') flat bottom		6.65	7.40
Bucket capacity ISO heaped m <sup>3</sup>		1.6	1.6

## Digging Force (ISO 6015)

Unit: kN

Arm length	Short 2.6 m	Standard 3.3 m
Bucket digging force	229 252*	229 252*
Arm crowding force	207 228*	165 182*

\*Power Boost engaged.

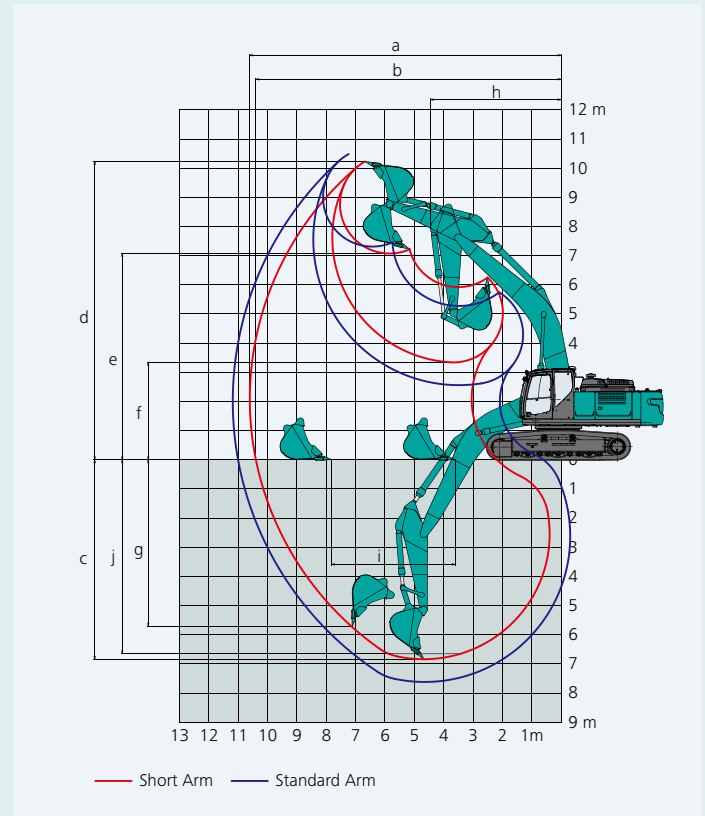



## Dimensions

Arm length	Short 2.6 m	Standard 3.3 m
A Overall length	11,380	11,300
B Overall height (to top of boom)	3,690	3,430
C Overall width	3,190	
D Overall height (to top of cab)	3,170	
E Ground clearance of rear end*	1,220	
F Ground clearance*	500	

Unit: mm

G Tail swing radius	3,600
G' Distance from center of swing to rear end	3,600
H Tumbler distance	4,050
I Overall length of crawler	4,970
J Track gauge	2,590
K Shoe width	600
L Overall width of upperstructure	2,980

\*Without including height of shoe

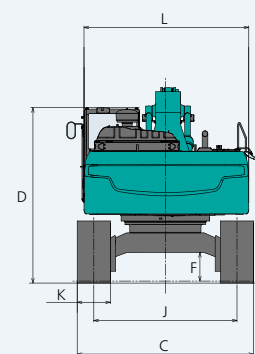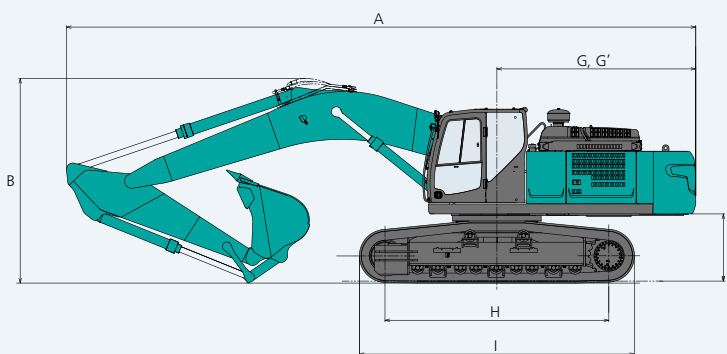


## Operating Weight & Ground Pressure

In standard trim, with standard boom, 2.6m arm, and 1.9 m<sup>3</sup> ISO heaped bucket

Shaped	Triple grouser shoes (even height)	
Shoe width	mm	600
Overall width	mm	3,190
Ground pressure	kPa	71
Operating weight	kg	37,800



















Rating over front



Rating over side or 360 degrees

A: Reach from swing centerline to arm top  
B: Arm top height above/below ground  
C: Lifting capacities in Kilograms  
Bucket: Without bucket  
Relief valve setting: 34.3 MPa (350 kgf/cm<sup>2</sup>)

SK380XDLC		Standard Arm: 3.3 m Bucket: Without Shoe: 600 mm Counterweight: 7,890 kg														
A  B		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		
																Radius
9.0 m	kg													*5,730	*5,730	6.56 m
7.5 m	kg									*6,860	*6,860			*5,240	*5,240	7.86 m
6.0 m	kg									*6,960	*6,960			*5,060	*5,060	8.71 m
4.5 m	kg							*8,550	*8,550	*7,440	7,420	*6,860	5,510	*5,060	*5,060	9.25 m
3.0 m	kg					*13,280	*13,280	*9,790	9,780	*8,080	7,070	*7,120	5,350	*5,230	4,890	9.52 m
1.5 m	kg					*15,180	13,680	*10,880	9,190	*8,690	6,740	*7,390	5,190	*5,560	4,750	9.54 m
G.L.	kg					*15,830	13,190	*11,520	8,800	*9,080	6,500	*7,510	5,070	*6,130	4,830	9.33 m
-1.5 m	kg			*13,930	*13,930	*15,490	13,090	*11,560	8,640	*9,080	6,390			*7,080	5,160	8.85 m
-3.0 m	kg	*15,860	*15,860	*19,450	*19,450	*14,310	13,230	*10,900	8,680	*8,430	6,440			*7,500	5,890	8.07 m
-4.5 m	kg			*15,790	*15,790	*12,000	*12,000	*9,100	8,940					*7,390	*7,390	6.88 m

SK380XDLC		Short Arm: 2.6 m Bucket: Without Shoe: 600 mm Counterweight: 7,890 kg										
A	B	3.0 m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
7.5 m	kg									*7,730	*7,730	7.06 m
6.0 m	kg					*8,280	*8,280	*7,580	7,480	*7,510	6,680	8.00 m
4.5 m	kg			*11,900	*11,900	*9,230	*9,230	*7,940	7,230	*7,470	5,820	8.58 m
3.0 m	kg					*10,350	9,490	*8,470	6,920	*7,540	5,380	8.87 m
1.5 m	kg					*11,240	8,970	*8,950	6,630	*7,660	5,230	8.89 m
G.L.	kg			*15,660	13,040	*11,610	8,680	*9,160	6,450	*7,810	5,340	8.66 m
-1.5 m	kg			*14,840	13,100	*11,340	8,620	*8,890	6,410	*7,940	5,790	8.15 m
-3.0 m	kg	*16,720	*16,720	*13,220	*13,220	*10,250	8,760			*7,940	6,820	7.29 m
-4.5 m	kg	*12,590	*12,590	*10,190	*10,190					*7,440	*7,440	5.95 m

## Notes:

- Do not attempt to lift or hold any load that is greater than these lifting capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lifting capacities.
- Lifting capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top pin is defined as lift point.
- The above lifting capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Lifting capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lifting capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

## Excavator Remote Monitoring System

Remote Monitoring System is a satellite-based system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

### Direct Access to Operational Status

#### Location Data

Accurate location data can be obtained even from sites where communications are difficult.

#### Operating Hours

A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable.

Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

#### Fuel Consumption Data

Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

#### Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (N&B).

Note: Remote monitoring system is not applicable in some area due to country regulation of the communication lines or availability of infrastructure.



### Maintenance Data and Warning Alerts

#### Machine Maintenance Data

Provides maintenance status of separate machines operating at multiple sites.

Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

### Security System

#### Engine Start Alarm

Sends a notification if the engine is started outside of pre-defined hours.

#### Area Alarm

Sends a notification if the machine leaves a pre-defined area.



## STANDARD EQUIPMENT

### ENGINE

- Engine, HINO J08E, diesel engine with turbocharger and intercooler
- Automatic engine deceleration
- Auto Idle Stop (AIS)
- Batteries (2 x 12V - 104Ah)
- Starting motor (24V - 5 kW), 60 amp alternator
- Automatic engine shut-down for low engine oil pressure
- Engine oil pan drain cock
- Double element air cleaner
- Pre-air cleaner

### CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Power Boost

### SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- Grease-type track adjusters
- 600mm HD triple grouser shoe
- Automatic swing brake
- Tow eyes
- Travel alarm

### HYDRAULIC

- Boom regeneration system
- Arm interflow system
- Auto warm up system
- Aluminum hydraulic oil cooler
- Hydraulic fluid filter clog detector
- 1way piping (Breaker)

### MIRRORS & LIGHTS

- Two rear view mirrors
- Six front working lights (Two for boom, one for boom cylinder, one for right storage box and two for cab)

### CAB & CONTROL

- Rops cab, all-weather sound suppressed type
- Two control levers, pilot-operated
- Horn, electric
- Cab light (interior)
- Luggage tray
- Large cup holder
- Detachable two-piece floor mat
- Headrest
- Handrails
- Intermittent windshield wiper with double-spray washer
- Tinted safety glass
- Pull-up type front window and removable lower front window
- Easy-to-read multi-display color monitor
- Automatic air conditioner
- Emergency escape hammer
- Double slide seat
- 7 way adjustable suspension seat
- 24V outlet

## OPTIONAL EQUIPMENT

- Refilling pump
- CAB guards
- 2.60m Short arm
- 1.4m<sup>3</sup> bucket
- 1.8m<sup>3</sup> bucket

- Rotatory beacon
- 2way piping(Nibbler & Breaker)
- Rear view camera

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

## KOBELCO CONSTRUCTION MACHINERY CO., LTD.

5-15, Kitashinagawa 5-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN  
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135  
<https://www.kobelcocm-global.com/>

Inquiries To: