

STANDARD EQUIPMENT

- ENGINE

  - Engine, HINO J08E, Diesel engine with turbocharger and intercooler
  - Automatic engine deceleration
  - Auto Idle Stop (AIS)
  - Batteries (2 × 12V - 96Ah)
  - Starting motor (24V - 5 kW), 50 amp alternator
  - Removable clean-out screen for radiator
  - Automatic engine shut-down for low engine oil pressure
  - Engine oil pan drain valve
  - Double element air cleaner

CONTROL

  - Working mode selector (H-mode and S-mode)
  - Power Boost

SWING SYSTEM & TRAVEL SYSTEM

  - Swing rebound prevention system
  - Straight propel system
  - Two-speed travel with automatic shift down
  - Sealed & lubricated track links
  - Grease-type track adjusters
  - Automatic swing brake

HYDRAULIC

  - Arm regeneration system
  - Auto warm up system
  - Aluminum hydraulic oil cooler

MIRRORS & LIGHTS

  - Two rearview mirrors
  - Three front and two rear working lights
  - Swing flashers
- CAB & CONTROL

  - Two control levers, pilot-operated
  - Tow eyes
  - Horn, electric
  - Integrated left-right slide-type control box
  - Cab, all-weather sound suppressed type
  - Ashtray
  - Cigarette lighter
  - Cab light (interior)
  - Coat hook
  - Luggage tray
  - Large cup holder
  - Detachable two-piece floor mat
  - 7-way adjustable suspension seat
  - Retractable seatbelt
  - Headrest
  - Handrails
  - Heater and defroster
  - Intermittent windshield wiper with double-spray washer
  - Skylight
  - Tinted safety glass
  - Pull-type front window and removable lower front window
  - Easy-to-read multi-display monitor
  - Automatic air conditioner
  - Emergency escape hammer
  - Suspension seat

OPTIONAL EQUIPMENT

- Wide range of buckets
  - Various optional arms
  - Wide range of shoes
  - Front-guard protective structures
  - Additional track guide
- Additional hydraulic circuit
  - Arm rest
  - Additional counterweight
  - Multi-control valve
  - Rain visor

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

KOBELCO CONSTRUCTION MACHINERY CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN  
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135  
[www.kobelco-kenki.co.jp/english\\_index.html](http://www.kobelco-kenki.co.jp/english_index.html)

Inquiries To:

KOBELCO

Hydraulic Excavators

ACERA  
GEOSPEC

Super X

SK330  
SK350LC

- Bucket Capacity:  
**1.2 – 2.3 m³ ISO heaped**
- Engine Power:  
**209 kW {284 PS}/2,100 min⁻¹{rpm}**  
(ISO14396)
- Operating Weight (800 mm shoe):  
**34,700 kg – SK330**  
**35,500 kg – SK350LC**

Complies with the latest exhaust emission regulations



US  
EPA Tier III



EU (NRMM)  
Stage IIIA



Japanese  
Regulations

We Save You Fuel  
Achieving a Low-Carbon Society

Announcing ACERA GEOSPEC and the Concept of Beautiful Performance.

# The Power Wave of Change

When we set out to design our new hydraulic excavators, we kept our eyes on the big picture.  
Of course we wanted machines with greater digging capacity.  
But they also had to be fuel-efficient and economical, while imposing less of a burden on the local and global environments.  
Applying our advanced technologies, we developed KOBELCO's new ACERA GEOSPEC series,  
an entirely new kind of excavator that beautifully balances all the demands of today's construction industry.  
Lean and efficient with capacity to spare, these sleek powerhouses bring a whole new style to the worksite while setting  
new standards for environmental responsibility.



Pursuing the "Three E's"

The Perfection of Next-Generation, Network Performance

### Enhancement

#### Greater Performance Capacity

- New hydraulic circuitry minimizes pressure loss
- High-efficiency, electronically controlled Common Rail Fuel Injection Engine
- Powerful travel and arm/bucket digging force

### Economy

#### Improved Cost Efficiency

- Advanced power plant that reduces fuel consumption
- Easy maintenance that reduces upkeep costs
- High structural durability and reliability that retain machine value longer

### Environment

#### Features That Go Easy on the Earth

- Meets the latest exhaust emission standards\*
- Auto Idle Stop as standard equipment
- Noise reduction measures (with improvement of the sound quality) minimize noise and vibration

\*In some regions, products do not feature EGR (exhaust gas recirculation) and are not Tier III-compliant.




The "GEO" in GEOSPEC expresses our deep respect for our planet, and for the solid ground where excavators are in their element. This is accompanied by SPEC, which refers to the performance specifications needed to get the job done efficiently as we carry on the tradition of the urban-friendly ACERA series.



Photos in this catalog are the optional specs with 0.93 m<sup>3</sup> bucket, 800 mm shoes, arm rock guard, and pre-air cleaner.

### The GEOSPEC Difference: Efficient Performance!

Amazing Productivity with a 27 % Increase in Work Volume and "Top-Class" Cost-Performance

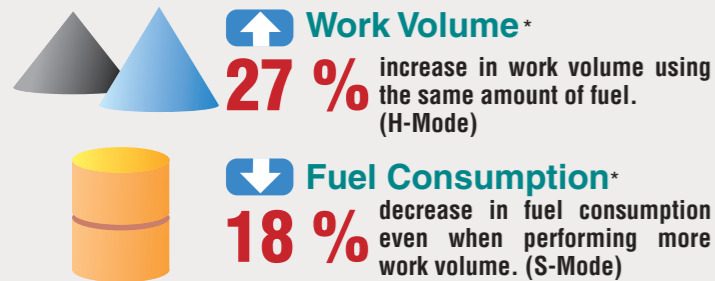

#### "Top-Class" Powerful Digging

Max. arm crowding force: **165 kN** {16.8 tf}

Max. arm crowding force with power boost: **181 kN** {18.5 tf}

Max. bucket digging force: **222 kN** {22.6 tf} ↑

Max. bucket digging force with power boost: **244 kN** {24.9 tf} ↑

#### Powerful Travel

Travel torque: increased by **13 %** ↑

Drawbar pulling force: **322 kN** {32.8 tf} ↑

#### Greater Swing Power, Shorter Cycle Times

Swing torque: increased by **7 %** ↑

Swing speed: **16 %** ↑  
faster (10.0 min<sup>-1</sup>)

#### Significant Extension of Continuous Working Hours

The combination of a large-capacity fuel tank and excellent fuel efficiency delivers an impressive 22 % increase in continuous operation hours.\*\*

Fuel tank: **580L**

**22 %** ↑

#### Light Lever Operation

It takes 10% less effort to move the control levers, so that operators can work longer hours with less fatigue.

**10 % Less**




#### NEXT-3E Technology New Hydraulic System




Rigorous inspections for pressure loss are performed on all components of the hydraulic piping, from the first spool of the control valve to the connectors. This regimen, combined with the use of a new, high-efficiency pump, cuts energy loss to a minimum.

#### NEXT-3E Technology Next-Generation Electronic Engine Control

The high-pressure, common-rail fuel-injection engine features a cooled EGR (Exhaust Gas Recirculation) device that lowers the air intake temperature to keep the oxygen concentration down. The multiple injection system features adjustable control to maximize fuel efficiency and provide powerful medium/low-speed torque. The result is a highly fuel-efficient engine that greatly reduces emissions of PM (particulate matter) and NOx into the atmosphere.

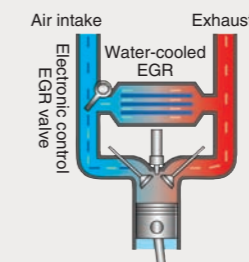

#### Simple Select: Two Digging Modes

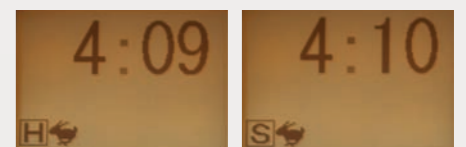

**H-Mode** For heavy duty when a higher performance level is required.

**S-Mode** For normal operations with lower fuel consumption.

**Optional N&B (crusher and breaker)**  
The operator selects the desired mode from inside the cab, and the selector valve automatically configures the machine accordingly.

**Optional Attachment Mode Selector Switch**  
There's a choice of three different hydraulic circuits, to accommodate bucket, crusher or breaker, and the desired attachment mode can be selected with a switch, which automatically configures the selector valve. All attachment modes can be used in either S-mode or H-mode.



#### Seamless, Smooth Combined Operations

The GEOSPEC machines have inherited the various systems that make inching and combined operations easy and accurate, with further refinements that make a good thing even better. Leveling and other combined operations can be carried out with graceful ease.

- Electronic Active Control System
- Arm regeneration system
- Boom lowering system
- Variable swing priority system
- Swing rebound prevention system

#### NEXT-3E Technology Total Tuning Through Advanced ITCS Control

The next-generation engine control is governed by a new version of ITCS, which responds quickly to sudden changes in hydraulic load to ensure that the engine runs as efficiently as possible with a minimum of wasted output.

**ITCS** (Intelligent Total Control System) is an advanced, computerized system that provides comprehensive control of all machine functions.

\*The value shows results from actual measurements taken by KOBELCO when compared with previous KOBELCO models.

\*\*The value shows results from actual measurements taken by KOBELCO for continuous operation in S Mode, compared with previous models. Results vary depending on the method of operation and load conditions.

## The GEOSPEC Difference:

# The Value and Quality of Sturdy Construction!

### Stable Attachment Strength

Forged and cast steel components are used throughout. The standard arm and boom also meet specifications that were classified as "reinforced" on previous KOBELCO models to ensure reliable strength.



### Pre-air Cleaner (optional) **NEW!**


The optional pre-air cleaner prolongs a replacement cycle of main air cleaner.



Integrated cast steel boom top



Cast steel boom foot boss



Forged steel arm foot boss



● Reinforced arm

HD boom

HD arm

### Enhanced Upper Carbody Strength

The structure of the lower portion of the upper frame has been reassessed and the undercover area has been minimized for further strength.





### Durability That Retains Machine Value Five and Ten Years in the Future

- New operator's seat covered in durable, material
- High-quality urethane paint
- Easily repaired bolted hand rails

### Emergency Acceleration (Dial) Permits Continued Operation in the Unlikely Event of Malfunction



If unexpected trouble is experienced with the ITCS mechatronic control system, the machine can still be operated using the emergency acceleration system. Digging modes are also automatically relayed to an emergency system so that digging can continue temporarily until a service person arrives to repair the primary system.

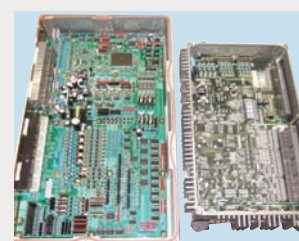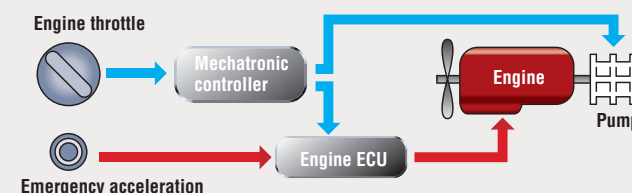

New MCU Conventional MCU


### Newly designed MCU

- Vertical alignment and sealed cover gives better protection from water and dust
- Integration in base plate boosts assembly quality
- Reliable fixture to base plate

### Countermeasures Against Electrical System Failure

All elements of the electrical system, including controller, have been designed for enhanced reliability.

The pump capacity has been **22 %** increased by compared with previous models.

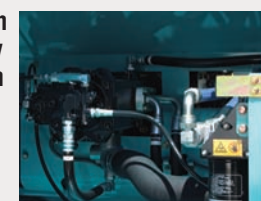


## The GEOSPEC Difference:

# Designed for the Environment and the Future!

### Meets Standard Values Set by Emissions Regulations

The engine used in the GEOSPEC machines represents the crystallization of various cutting-edge technologies that minimize the emission of PM (Particulate Matter), NOx, black smoke, and other emissions, thus meeting all internationally recognized environmental regulations, including US EPA Tier III, NRMM (Europe) Stage IIIA, and the latest Japanese regulations.


### Auto Idle Stop Provided as Standard Equipment

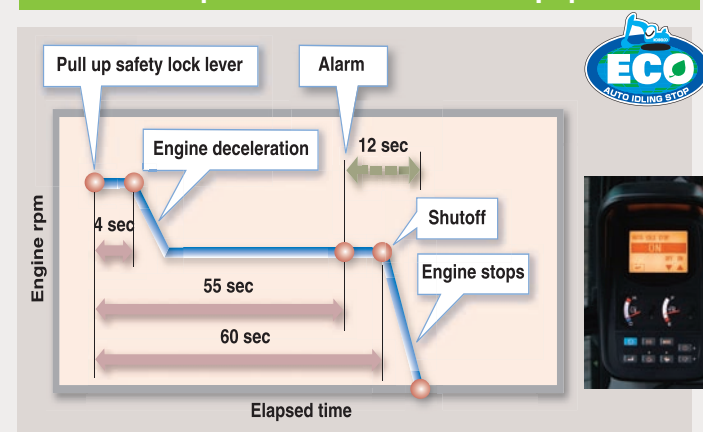

This function saves fuel and cuts emissions by shutting down the engine automatically when the machine is on stand by. It also stops the hourmeter, which helps to retain the machine's asset value.

### Automatic Acceleration/Deceleration Function Reduces Engine Speed

Engine speed is automatically reduced when the control lever is placed in neutral, effectively saving fuel and reducing noise and exhaust emissions. The engine quickly returns to full speed when the lever is moved out of neutral.

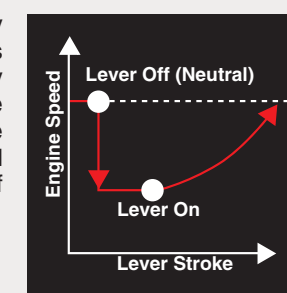

### Low Noise Level and Mild Sound Quality

The electronically controlled common-rail engine has a unique fuel injection system that runs quietly. Also, the hydraulic pumps have been redesigned to produce a more pleasant sound during pressure relief. In short, the GEOSPEC series meets all requirements cited in latest EU stage II.

### Meets EMC (Electromagnetic Compatibility) Standards in Europe.

Measures have been taken to ensure that the GEOSPEC machines do not cause electro-magnetic interference.

### The GEOSPEC Difference:

## "On the Ground" Maintenance!


### Comfortable "On the Ground" Maintenance

The machine layout was designed with easy inspection and maintenance in mind.



### Access through the right side cover

A new fuel filter has been installed that can handle the most punishing conditions. It now has two pre-fuel filters (with built-in water separators), and a high-grade main fuel filter with an ultra-fine 2 micron mesh that removes 95% of dust and other impurities in the fuel.

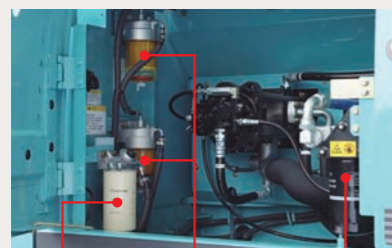

Main fuel filter  
Pre-fuel filter  
(with built-in water separators)  
Engine Oil Filter



Main fuel filter

### Quick Oil Drain Valves for Quick Maintenance



Quick drain valve



Fuel drain valve

### More Efficient Maintenance Inside the Cab



● Detachable two-piece floor mat with handles for easy removal. A floor drain is located under the mat.



● Easy-access fuse box. More finely differentiated fuses make it easier to locate malfunctions.




● Air conditioner filter can be easily removed without tools for cleaning.



● Hour meter can be checked while standing on the ground.




● Large-capacity tool box can hold up to three pails.

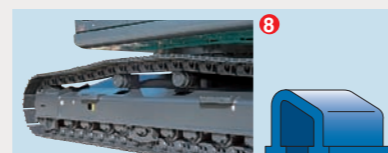

● Special crawler frame design is easily cleaned of mud.

### Access through the left side cover

### Parallel Cooling Units Are Easy to Clean

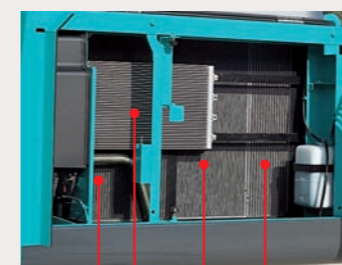

Oil cooler  
Radiator  
Air conditioner condenser  
Intercooler

### Highly Durable Super-fine Filter



● Super-fine filter

The high-capacity hydraulic oil filter incorporates glass fiber with superior cleaning power and durability. With a replacement cycle of 1,000 hours and a construction that allows replacement of the filter element only, it's both highly effective and highly economical.

### Double-Element Air Cleaner as Standard



The large-capacity element features a double-filter structure that keeps the engine running clean even in dusty environments.


Air cleaner (double element)

### Monitor Display with Essential Information for Accurate Maintenance Checks



- Displays only the maintenance information that's needed, when it's needed.
- Self-diagnostic function that provides early-warning detection and display of electrical system malfunctions.
- Record previous breakdowns, including irregular and transient malfunctions.

### Choice of 16 Languages for Monitor Display



With messages including those requiring urgent action displayed in the local language, users in all parts of the world can work with greater peace of mind.

充電不良 Chinese	Lichtmaschine defekt German	CHARGE ERROR English	CHARGE ERROR English (US)
ERREUR DE CHARGE French	PENGISIAN BATT. RUSAK Indonesian		ERRORE DI CARICA Italian
チャージ Japanese	KESALAHAN CAS Malay	အမှတ်ပေးပါ Myanmar(Burmese)	ERRO DE CARGA Portuguese
ERROR EN CARGA Spanish	தவறாக திணித்தல் Tamil	ข้อผิดพลาด Thai	Sạc Điện Bị Lỗi Vietnamese

## The GEOSPEC Difference:

# Designed from the Operator's Point of View

## Wide Field of View Liberates the Operator

The front field of view easily clears ISO standards, while the peripheral view reduces blind spots to a minimum.



- A long wiper covers a wide area for a broad view in bad weather.
- Back mirrors provide a safe view of the rear.
- Reinforced green glass windows meet European standards.

## Wide-Access Cab Ensures Smooth Entry and Exit

The left control box lifts up with the safety lock lever to add 10° to the cab entry angle for easy entrance and exit.



## Plenty of Foot Room

With a total width of 1,005 mm, the cab has 35 mm more front to-back foot room than previous models. The travel pedal is larger for greater operator comfort.

## Reduced Vibration for Fatigue-Free Operation

The rigid cab construction and liquid-filled viscous cab mounts minimize cab vibration. In addition, the use of new lower rollers on the crawlers cuts travel vibration in half compared with previous models.

## In-Cab Noise is Reduced by 3dB Compared with Previous Models.



## Newly Designed Information Display Prioritizes Visual Recognition

The analog gauge provides information that's easy to read regardless of the operating environment. The information display screen has been enlarged, and a visor is attached to further enhance visibility.



Photo includes optional pedals for N&B and rotation.

## Creating a Comfortable Operating Environment



- Seat can be reclined to horizontal position




- Double slide and suspension seat



- Powerful automatic air conditioner



- Spacious luggage tray



- One-touch lock release simplifies opening and closing the front window



- Large cup holder

- New interior design and materials create an elegant feel

## The GEOSPEC Difference:

# Imagining Possible Scenarios and Preparing in Advance

## Bracket for Attaching a Head Guard Provided as Standard Equipment



A bracket is provided as standard equipment that allows the optional head guard to be simply bolted on.

## Safety Features That Take Various Scenarios into Consideration



- Firewall separates the pump compartment from the engine



- Hammer for emergency exit



- Swing flashers/rear working lights

- Thermal guard prevents contact with hot components during engine inspections
- Hand rails meet European standards
- Retractable seatbelt requires no manual adjustment



Specifications



Engine

Model	HINO J08E
Type:	Direct injection, water-cooled, 4-cycle diesel engine with turbocharger, intercooler (Complies with EU (NRMM) Stage IIIA, US EPA Tier III, and Act on Regulation, Etc. of Emissions from Non-road Special Motor Vehicles (Japan))
No. of cylinders:	6
Bore and stroke:	112 mm X 130 mm
Displacement:	7.684 L
Rated power output:	209 kW/2,100 min <sup>-1</sup> (ISO14396:2002) 197 kW/2,100 min <sup>-1</sup> (ISO9249:2007)*
Max. torque:	998 N·m/1,600 min <sup>-1</sup> (ISO14396:2002) 969 N·m/1,600 min <sup>-1</sup> (ISO9249:2007)*

\*Previous indication



Hydraulic System

Pump	
Type:	Two variable displacement pumps + 1 gear pump
Max. discharge flow:	2 X 294 L/min, 1 X 20 L/min
Relief valve setting	
Boom, arm and bucket:	34.3 MPa {350 kgf/cm²}
Power Boost:	37.8 MPa {385 kgf/cm²}
Travel circuit:	34.3 MPa {350 kgf/cm²}
Swing circuit:	29.0 MPa {296 kgf/cm²}
Control circuit:	5.0 MPa {50 kgf/cm²}
Pilot control pump:	Gear type
Main control valves:	8-spool
Oil cooler:	Air cooled type



Swing System

Swing motor:	Axial-piston motor
Brake:	Hydraulic; locking automatically when the swing control lever is in the neutral position
Parking brake:	Hydraulic disc brake
Swing speed:	10.0 min <sup>-1</sup> {rpm}
Tail swing radius:	3,500 mm
Min. front swing radius:	4,370 mm



Attachments

Backhoe bucket and arm combination

Use		Backhoe bucket						
		Normal digging				Light-duty	Heavy digging	
Bucket capacity	ISO heaped	m³	1.2	1.4	1.6	2.3	1.8	1.4
	Struck	m³	0.84	1.0	1.2	1.84	1.4	1.0
Opening width	With side cutter	mm	1,240	1,420	1,570	1,930	—	1,390
	Without side cutter	mm	1,110	1,300	1,450	1,760	1,680	1,330
No. of bucket teeth			4	5	5	6	5	5
Bucket weight		kg	930	1,070	1,100	1,500	1,200	1,300
Combinations	2.25 m super short arm		○	○	○	○	○	○
	2.6 m short arm		○	○	○	×	△	○
	3.3 m standard arm		○	○	○	×	×	○
	4.15 m long arm		○	△	×	×	×	×

○ Recommended △ Loading only × Not recommended



Travel System

Travel motors:	2 X axial-piston, two-step motors
Travel brakes:	Hydraulic brake per motor
Parking brakes	Oil disc brake per motor
Travel shoes:	45 each side (SK330)
	48 each side (SK350LC)
Travel speed:	5.6/3.3 km/h
Drawbar pulling force:	322 kN (ISO7464)
Gradeability:	70 % {35°}
Ground clearance:	500 mm



Cab & Control

Cab	All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat.
Control	Two hand levers and two foot pedals for travel Two hand levers for excavating and swing Electric rotary-type engine throttle



Boom, Arm & Bucket

Boom cylinders:	140 mm X 1,550 mm
Arm cylinder:	170 mm X 1,788 mm
Bucket cylinder:	150 mm X 1,193 mm



Refilling Capacities & Lubrications

Fuel tank:	580 L
Cooling system:	31.1 L
Engine oil:	28.5 L
Travel reduction gear:	2 X 9.5 L
Swing reduction gear:	7.4 L
Hydraulic oil tank:	280 L tank oil level
	353 L hydraulic system



Working Ranges

		Unit: m		
Boom		6.5 m		
Range	Arm	Short 2.6 m	Standard 3.3 m	Long 4.15 m
a - Max. digging reach		10.61	11.26	11.97
b - Max. digging reach at ground level		10.4	11.06	11.79
c - Max. digging depth		6.86	7.56	8.41
d - Max. digging height		10.26	10.58	10.7
e - Max. dumping clearance		7.06	7.37	7.53
f - Min. dumping clearance		3.32	2.62	1.77
g - Max. vertical wall digging depth		5.84	6.61	7.15
h - Min. swing radius		4.45	4.37	4.43
i - Horizontal digging stroke at ground level		4.21	5.82	7.21
j - Digging depth for 2.4 m (8') flat bottom		6.67	7.4	8.27
Bucket capacity ISO heaped	m³	1.6	1.4	1.2


Digging Force (ISO 6015)		Unit: kN (tf)		
Arm length		Short 2.6 m	Standard 3.3 m	Long 4.15 m
Bucket digging force		221 {22.5}	222 {22.6}	221 {22.5}
		244 {24.9}*	244 {24.9}*	243 {24.8}*
Arm crowding force		205 {20.9}	165 {16.8}	140 {14.3}
		225 {22.9}*	181 {18.5}*	154 {15.7}*

\*Power Boost engaged.



Dimensions


Arm length		Short 2.6 m	Standard 3.3 m	Long 4.15 m
A Overall length		11,280	11,200	11,230
B Overall height (to top of boom)		3,640	3,420	3,590
C Overall width	SK330	3,400 (with 800 mm shoes)		
	SK350LC	3,400 (with 800 mm shoes)		
D Overall height (to top of cab)		3,160	3,160	3,160
E Ground clearance of rear end*		1,190	1,190	1,190
F Ground clearance*		500	500	500

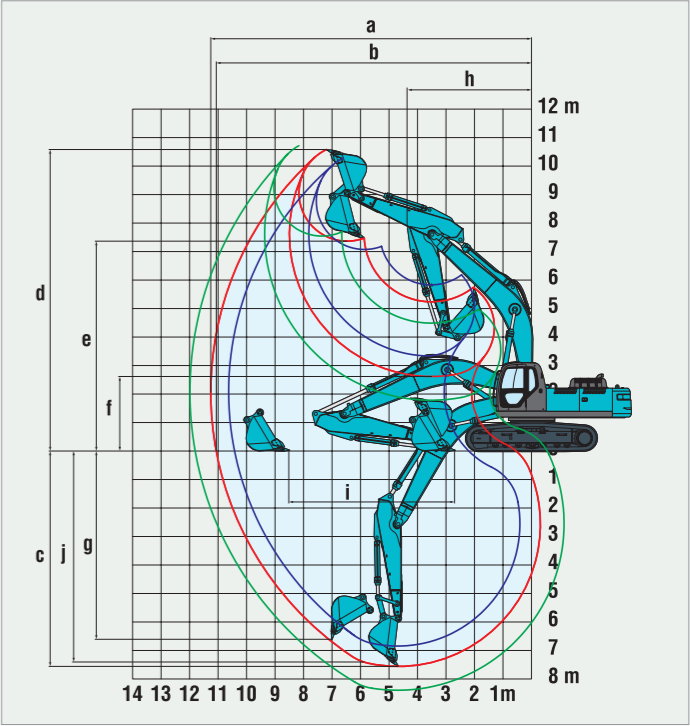

— Short Arm  
— Standard Arm  
— Long Arm

		Unit: mm		
G Tail swing radius		3,500	3,500	3,500
G' Distance from center of swing to rear end		3,500	3,500	3,500
H Tumbler distance	SK330	3,730	3,730	3,730
	SK350LC	4,050	4,050	4,050
I Overall length of crawler	SK330	4,650	4,650	4,650
	SK350LC	4,980	4,980	4,980
J Track gauge	SK330	2,600	2,600	2,600
	SK350LC	2,600	2,600	2,600
K Shoe width		600/800		
L Overall width of upperstructure		2,950	2,950	2,950

\* Without including height of shoe lug.

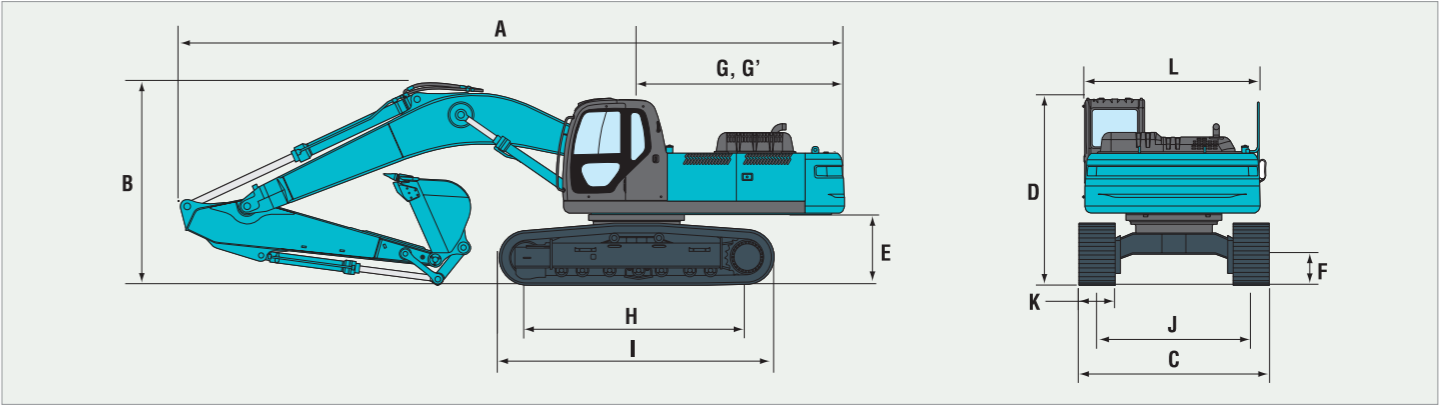


Operating Weight & Ground Pressure

In standard trim, with standard boom, 3.3 m arm, and 1.4 m³ ISO heaped bucket

Shaped		Triple grouser shoes (even height)	
Shoe width	mm	600	800
Overall width	mm	SK330	3,200
		SK350LC	3,200
Ground pressure	kPa (kgf/cm²)	SK330	68 {0.70}
		SK350LC	64 {0.66}
Operating weight	kg	SK330	33,700
		SK350LC	34,400

Lifting Capacities

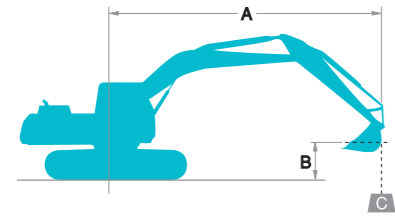





























Rating over front































Rating over side or 360 degrees















- A - Reach from swing centerline to bucket hook  
B - Bucket hook height above/below ground  
C - Lifting capacities in kilograms
- Max. discharge pressure: 37.8 MPa (385 kgf/cm²)















SK330		Standard Arm: 3.3 m Bucket: 1.4 m³ ISO heaped 1,070 kg Shoe: 600 mm															
A	B	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius	
																	
7.5 m	kg									*5,640	*5,640			*3,650	*3,650	8.05 m	
6.0 m	kg									*5,840	*5,840			*3,600	*3,600	8.88 m	
4.5 m	kg								*7,320	*7,320	*6,370	*6,370	*5,840	4,570	*3,690	*3,690	9.41 m
3.0 m	kg				*12,590	*12,590	*11,730	*11,730	*8,630	*7,070	6,030	*6,180	4,390	*3,920	3,830	9.67 m	
1.5 m	kg				*7,080	*7,080	*13,950	12,320	*9,850	8,010	*7,760	5,680	6,110	4,200	*4,320	3,680	9.70 m
G. L.	kg				*10,390	*10,390	*15,020	11,670	*10,670	7,570	7,930	5,410	5,960	4,050	*4,980	3,720	9.49 m
-1.5 m	kg	*10,760	*10,760	*14,890	*14,890	*15,030	11,460	*10,920	7,360	7,770	5,260	5,890	3,990	5,870	3,980	9.02 m	
-3.0 m	kg	*15,190	*15,190	*20,250	*20,250	*14,170	11,530	*10,500	7,340	7,770	5,260			6,740	4,580	8.26 m	
-4.5 m	kg	*20,200	*20,200	*16,970	*16,970		11,820	*9,150	7,530					*7,250	5,890	7.10 m	
-6.0 m	kg					*8,560	*8,560							*7,090	*7,090	5.29 m	

SK330		Standard Arm: 3.3 m Bucket: 1.4 m³ ISO heaped 1,070 kg Shoe: 800 mm														
A		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
																
7.5 m	kg									*5,640	*5,640			*3,650	*3,650	8.05 m
6.0 m	kg									*5,840	*5,840			*3,600	*3,600	8.88 m
4.5 m	kg							*7,320	*7,320	*6,370	*6,370	*5,840	4,730	*3,690	*3,690	9.41 m
3.0 m	kg			*12,590	*12,590	*11,730	*11,730	*8,630	*8,630	*7,070	6,230	*6,180	4,550	*3,920	*3,920	9.67 m
1.5 m	kg			*7,080	*7,080	*13,950	12,710	*9,850	8,280	*7,760	5,880	6,340	4,360	*4,320	3,820	9.70 m
G. L.	kg			*10,390	*10,390	*15,020	12,060	*10,670	7,840	8,220	5,610	6,180	4,210	*4,980	3,870	9.49 m
-1.5 m	kg	*10,760	*10,760	*14,890	*14,890	*15,030	11,850	*10,920	7,620	8,060	5,460	6,120	4,150	*6,070	4,140	9.02 m
-3.0 m	kg	*15,190	*15,190	*20,250	*20,250	*14,170	11,920	*10,500	7,610	*8,040	5,460			*6,990	4,750	8.26 m
-4.5 m	kg	*20,200	*20,200	*16,970	*16,970	*12,270	12,220	*9,150	7,790					*7,250	6,100	7.10 m
-6.0 m	kg					*8,560	*8,560							*7,090	*7,090	5.29 m

SK330		Long Arm: 4.15 m Bucket: 1.2 m³ ISO heaped 930 kg Shoe: 600 mm															
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius	
																	
7.5 m	kg													*2,830	*2,830	8.85 m	
6.0 m	kg											*4,670	*4,670	*2,780	*2,780	9.62 m	
4.5 m	kg										*5,630	*5,630	*5,220	4,670	*2,850	*2,850	10.11 m
3.0 m	kg			*15,930	*15,930	*10,040	*10,040	*7,650	*7,650	*6,390	6,150	*5,640	4,440	*3,020	*3,020	10.35 m	
1.5 m	kg			*12,530	*12,530	*12,620	*12,620	*9,030	8,170	*7,180	5,740	*6,090	4,210	*3,310	3,230	10.38 m	
G. L.	kg	*6,110	*6,110	*11,720	*11,720	*14,280	11,750	*10,090	7,600	*7,830	5,390	5,910	4,000	*3,780	3,230	10.18 m	
-1.5 m	kg	*9,500	*9,500	*14,260	*14,260	*14,880	11,310	*10,650	7,260	7,680	5,170	5,780	3,870	*4,520	3,410	9.74 m	
-3.0 m	kg	*12,990	*12,990	*18,060	*18,060	*14,560	11,210	*10,620	7,140	7,590	5,080	5,760	3,860	5,710	3,830	9.04 m	
-4.5 m	kg	*16,880	*16,880	*19,250	*19,250	*13,300	11,380	*9,830	7,210	*7,430	5,160			*6,700	4,700	8.00 m	
-6.0 m	kg			*15,020	*15,020	*10,720	*10,720	*7,800	7,530					*7,000	6,760	6.46 m	

SK330		Long Arm: 4.15 m    Bucket: 1.2 m³ ISO heaped 930 kg    Shoe: 800 mm															
A		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius	
																	
B																	
7.5 m	kg													*2,830	*2,830	8.85 m	
6.0 m	kg											*4,670	*4,670	*2,780	*2,780	9.62 m	
4.5 m	kg										*5,630	*5,630	*5,220	4,830	*2,850	*2,850	10.11 m
3.0 m	kg			*15,930	*15,930	*10,040	*10,040	*7,650	*7,650	*6,390	6,350	*5,640	4,600	*3,020	*3,020	10.35 m	
1.5 m	kg			*12,530	*12,530	*12,620	*12,620	*9,030	8,440	*7,180	5,930	*6,090	4,370	*3,310	*3,310	10.38 m	
G. L.	kg	*6,110	*6,110	*11,720	*11,720	*14,280	12,140	*10,090	7,870	*7,830	5,590	6,140	4,160	*3,780	3,370	10.18 m	
-1.5 m	kg	*9,500	*9,500	*14,260	*14,260	*14,880	11,700	*10,650	7,520	7,970	5,370	6,000	4,030	*4,520	3,550	9.74 m	
-3.0 m	kg	*12,990	*12,990	*18,060	*18,060	*14,560	11,610	*10,620	7,400	7,870	5,280	5,980	4,020	*5,830	3,980	9.04 m	
-4.5 m	kg	*16,880	*16,880	*19,250	*19,250	*13,300	11,780	*9,830	7,480	*7,430	5,360			*6,700	4,880	8.00 m	
-6.0 m	kg			*15,020	*15,020	*10,720	*10,720	*7,800	7,800					*7,000	*7,000	6.46 m	

SK350LC		Standard Arm: 3.3 m Bucket: 1.4 m³ ISO heaped 1,070 kg Shoe: 600 mm														
A		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
																
B																
7.5 m	kg									*5,640	*5,640			*3,650	*3,650	8.05 m
6.0 m	kg									*5,840	*5,840			*3,600	*3,600	8.88 m
4.5 m	kg							*7,320	*7,320	*6,370	*6,370	*5,840	4,680	*3,690	*3,690	9.41 m
3.0 m	kg			*12,590	*12,590	*11,730	*11,730	*8,630	*8,630	*7,070	6,160	*6,180	4,490	*3,920	*3,920	9.67 m
1.5 m	kg			*7,080	*7,080	*13,950	12,580	*9,850	8,190	*7,760	5,810	*6,530	4,310	*4,320	3,770	9.70 m
G. L.	kg	*10,760	*10,760	*10,390	*10,390	*15,020	11,930	*10,670	7,750	*8,270	5,540	*6,770	4,160	*4,980	3,820	9.49 m
-1.5 m	kg	*15,190	*15,190	*14,890	*14,890	*15,030	11,720	*10,920	7,530	*8,430	5,390	*6,370	4,100	*6,070	4,080	9.02 m
-3.0 m	kg	*20,200	*20,200	*20,250	*20,250	*14,170	11,790	*10,500	7,520	*8,040	5,390			*6,990	4,690	8.26 m
-4.5 m	kg			*16,970	*16,970	*12,270	12,080	*9,150	7,700					*7,250	6,030	7.10 m
-6.0 m	kg					*8,560	*8,560							*7,090	*7,090	5.29 m

SK350LC		Standard Arm: 3.3 m Bucket: 1.4 m³ ISO heaped 1,070 kg Shoe: 800 mm															
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius	
																	
7.5 m	kg									*5,640	*5,640			*3,650	*3,650	8.05 m	
6.0 m	kg									*5,840	*5,840			*3,600	*3,600	8.88 m	
4.5 m	kg								*7,320	*7,320	*6,370	*6,370	*5,840	4,840	*3,690	*3,690	9.41 m
3.0 m	kg			*12,590	*12,590	*11,730	*11,730	*8,630	*8,630	*7,070	6,360	*6,180	4,660	*3,920	*3,920	9.67 m	
1.5 m	kg			*7,080	*7,080	*13,950	12,980	*9,850	8,460	*7,760	6,010	*6,530	4,470	*4,320	3,920	9.70 m	
G. L.	kg			*10,390	*10,390	*15,020	12,330	*10,670	8,020	*8,270	5,740	*6,770	4,320	*4,980	3,970	9.49 m	
-1.5 m	kg	*10,760	*10,760	*14,890	*14,890	*15,030	12,120	*10,920	7,800	*8,430	5,600	*6,370	4,260	*6,070	4,240	9.02 m	
-3.0 m	kg	*15,190	*15,190	*20,250	*20,250	*14,170	12,190	*10,500	7,790	*8,040	5,590			*6,990	4,870	8.26 m	
-4.5 m	kg	*20,200	*20,200	*16,970	*16,970		*12,270	*12,270	*9,150	7,970				*7,250	6,250	7.10 m	
-6.0 m	kg					*8,560	*8,560							*7,090	*7,090	5.29 m	