

**STANDARD EQUIPMENT**

**ENGINE**

- Engine, HINO J08E, Diesel engine with turbocharger and intercooler
- Automatic engine deceleration
- Batteries (2 x 12V - 96Ah)
- Starting motor (24V - 5 kW), 50 amp alternator
- Removable clean-out screen for radiator
- Automatic engine shut-down for low engine oil pressure
- Engine oil pan drain valve
- Double element air cleaner

**CONTROL**

- Working mode selector (H-mode and S-mode)
- Power Boost
- Heavy lift

**SWING SYSTEM & TRAVEL SYSTEM**

- Swing rebound prevention system
- Straight propel system
- Swing priority system
- Two-speed travel with automatic shift down
- Independent travel system
- Sealed & lubricated track links
- Grease-type track adjusters
- Automatic swing brake
- Three track guides for each crawler

**HYDRAULIC**

- Arm regeneration system
- Auto warm up system
- Aluminum hydraulic oil cooler
- Tropical cooling package

**MIRRORS & LIGHTS**

- Two rearview mirrors
- Three front and two rear working lights
- Swing flashers

**CAB & CONTROL**

- Two control levers, pilot-operated
- Tow eyes
- Horn, electric
- Integrated left-right slide-type control box
- Cab, all-weather sound suppressed type
- Cab light (interior)
- Luggage tray
- Large cup holder
- Detachable two-piece floor mat
- Adjustable suspension seat
- Retractable seatbelt
- Headrest
- Handrails
- Heater and defroster
- Intermittent windshield wiper with double-spray washer
- Skylight
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read multi-display monitor
- Automatic air conditioner
- Emergency escape hammer
- Radio, AM/FM Stereo with speakers
- Travel alarm
- Refueling pump

**OPTIONAL EQUIPMENT**

- Wide range of buckets
- Various optional arms
- Wide range of shoes
- Front-guard protective structures
- Additional hydraulic circuit
- Two cab working lights
- Head guard

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

**KOBELCO CONSTRUCTION MACHINERY CO., LTD.**

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN  
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135  
www.kobelco-kenki.co.jp/english\_index.html

Inquiries To:

Bulletin No. SK350LC-SOUTH AMERICA-101

2013050000 Printed in Japan

Hydraulic Excavators

**SK350**LC

- Bucket Capacity:  
**1.4 – 2.3 m<sup>3</sup>**
- Engine Power:  
**280 HP/2,100 rpm (ISO14396)**
- Operating Weight:  
**35,700 – 36,800 kg**

**DRIVEN BY**  
**PASSION**

## STANDARD EQUIPMENT

### ENGINE

- Engine, HINO J08E, Diesel engine with turbocharger and intercooler
- Automatic engine deceleration
- Batteries (2 x 12V - 96Ah)
- Starting motor (24V - 5 kW), 50 amp alternator
- Removable clean-out screen for radiator
- Automatic engine shut-down for low engine oil pressure
- Engine oil pan drain valve
- Double element air cleaner

### CONTROL

- Working mode selector (H-mode and S-mode)
- Power Boost
- Heavy lift

### SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Swing priority system
- Two-speed travel with automatic shift down
- Independent travel system
- Sealed & lubricated track links
- Grease-type track adjusters
- Automatic swing brake
- Three track guides for each crawler

### HYDRAULIC

- Arm regeneration system
- Auto warm up system
- Aluminum hydraulic oil cooler
- Tropical cooling package

### MIRRORS & LIGHTS

- Two rearview mirrors
- Three front and two rear working lights
- Swing flashers

### CAB & CONTROL

- Two control levers, pilot-operated
- Tow eyes
- Horn, electric
- Integrated left-right slide-type control box
- Cab, all-weather sound suppressed type
- Cab light (interior)
- Luggage tray
- Large cup holder
- Detachable two-piece floor mat
- Adjustable suspension seat
- Retractable seatbelt
- Headrest
- Handrails
- Heater and defroster
- Intermittent windshield wiper with double-spray washer
- Skylight
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read multi-display monitor
- Automatic air conditioner
- Emergency escape hammer
- Radio, AM/FM Stereo with speakers
- Travel alarm
- Refueling pump

## OPTIONAL EQUIPMENT

- Wide range of buckets
- Various optional arms
- Wide range of shoes
- Front-guard protective structures
- Additional hydraulic circuit
- Two cab working lights
- Head guard

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalog may be reproduced in any manner without notice.

## KOBELCO CONSTRUCTION MACHINERY CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN  
Tel: +81 (0) 3-5789-2146 Fax: +81 (0) 3-5789-2135  
[www.kobelco-kenki.co.jp/english\\_index.html](http://www.kobelco-kenki.co.jp/english_index.html)

Inquiries To:

# The Power Wave of Change

When we set out to design our new hydraulic excavators, we kept our eyes on the big picture. Of course we wanted machines with greater digging capacity. But they also had to be fuel-efficient and economical, while imposing less of a burden on the local and global environments. Applying our advanced technologies, we developed SK series excavator that beautifully balances all the demands of today's construction industry.

Lean and efficient with capacity to spare, these sleek powerhouses bring a whole new style to the worksite while setting new standards for environmental responsibility.





## Pursuing the “Three E’s” The Perfection of Next-Generation, Network Performance

### Enhancement

#### Greater Performance Capacity

- Hydraulic circuitry minimizes pressure loss
- High-efficiency, electronically controlled Common Rail Fuel Injection Engine
- Powerful travel and arm/bucket digging force

### Economy

#### Improved Cost Efficiency

- Advanced power plant that reduces fuel consumption
- Easy maintenance that reduces upkeep costs
- High structural durability and reliability that retain machine value longer

### Environment

#### Features That Go Easy on the Earth

- Noise reduction measures (with improvement of the sound quality) minimize noise and vibration

# Efficient Performance!

Amazing Productivity with a 18 % Increase in Work Volume and “Top-Class” Cost-Performance

 **Work Volume\***  
**18 %** increase in work volume using the same amount of fuel. (H-Mode)

 **Fuel Consumption\***  
**18 %** decrease in fuel consumption even when performing more work volume. (S-Mode)

## “Top-Class” Powerful Digging

Max. arm crowding force: **203 kN** {20.7 tf}

Max. arm crowding force with power boost: **222 kN** {22.7 tf}

Max. bucket digging force: **267 kN** {27.2 tf} 

Max. bucket digging force with power boost: **292 kN** {29.8 tf} 

## Powerful Travel

Drawbar pulling force: **417 kN** {40.8 tf}

## Greater Swing Power, Shorter Cycle Times

Swing torque: **174.3 kN·m**  
{128.557 lbf·ft}

Swing speed: **7.8 min<sup>-1</sup>**

## Significant Extension of Continuous Working Hours

The combination of a large-capacity fuel tank and excellent fuel efficiency delivers an impressive increase in continuous operation hours.



## Light Lever Operation

It takes 10% less effort to move the control levers, so that operators can work longer hours with less fatigue.


**10 %  
Less**



## 3E Technology New Hydraulic System



Rigorous inspections for pressure loss are performed on all components of the hydraulic piping, from the first spool of the control valve to the connectors. This regimen, combined with the use of a new, high-efficiency pump, cuts energy loss to a minimum.

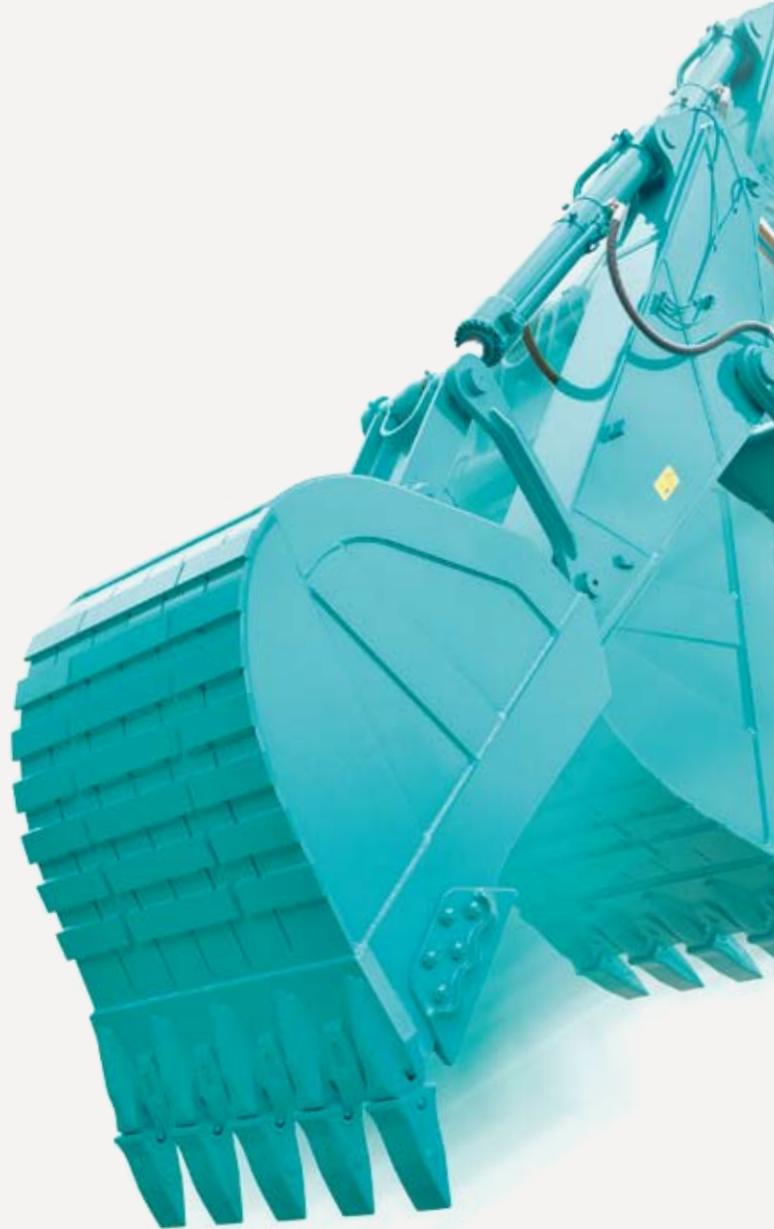


\*The value shows results from actual measurements taken by KOBELCO.



### 3E Technology Next-Generation Electronic Engine Control

The high-pressure, common-rail fuel-injection engine features a cooled EGR (Exhaust Gas Recirculation) device that lowers the air intake temperature to keep the oxygen concentration down. The multiple injection system features adjustable control to maximize fuel efficiency and provide powerful medium/low-speed torque. The result is a highly fuel-efficient engine that greatly reduces emissions of PM (particulate matter) and NOx into the atmosphere.

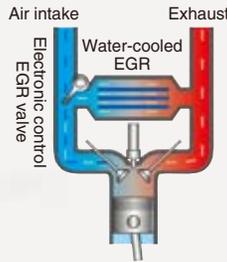

### Simple Select: Two Digging Modes



- H** For heavy duty when a higher performance level is required.
- S** For normal operations with lower fuel consumption.

#### **N&B (crusher and breaker)**

The operator selects the desired mode from inside the cab, and the selector valve automatically configures the machine accordingly.

#### **Attachment Mode Selector Switch**

There's a choice of three different attachment functions, to accommodate bucket, crusher or breaker, and the desired attachment mode can be selected with a switch, which automatically configures the selector valve. All attachment modes can be used in either S-mode or H-mode.



### Seamless, Smooth Combined Operations

The SK machines have inherited the various systems that make inching and combined operations easy and accurate, with further refinements that make a good thing even better. Leveling and other combined operations can be carried out with graceful ease.

- Electronic Active Control System
- Arm regeneration system
- Boom lowering system
- Variable swing priority system
- Swing rebound prevention system

### 3E Technology Total Tuning Through Advanced ITCS Control

The engine control is governed by ITCS, which responds quickly to sudden changes in hydraulic load to ensure that the engine runs as efficiently as possible with a minimum of wasted output.

**ITCS** ITCS (Intelligent Total Control System) is an advanced, computerized system that provides comprehensive control of all machine functions.

# The Value and Quality of Sturdy Construction!


## Stable Attachment Strength

Forged and cast steel components are used throughout. The standard arm and boom also meet specifications that were classified as "reinforced" on previous KOBELCO models to ensure reliable strength.


## Emergency Acceleration (Dial) Permits Continued Operation in the Unlikely Event of Malfunction



If unexpected trouble is experienced with the ITCS mechatronic control system, the machine can still be operated using the emergency acceleration system. Digging modes are also automatically relayed to an emergency system so that digging can continue temporarily until a service person arrives to repair the primary system.

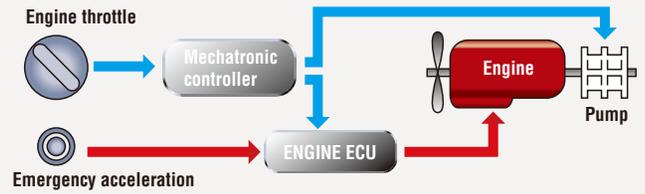

Integrated cast steel boom top



HD arm

Rock guard

● Reinforced arm

Standard HD boom



Cast steel boom foot boss



Forged steel arm foot boss

## High Durability That Retains Machine Value Five and Ten Years in the Future

- New operator's seat covered in durable, material
- High-quality urethane paint
- Easily repaired bolted hand rails



New MCU

Conventional MCU

### Newly designed Micro Computer Unit

- Vertical alignment and sealed cover gives better protection from water and dust
- Reliable fixture to base plate

### Countermeasures Against Electrical System Failure

All elements of the electrical system, including controller, have designed for high reliability.

### Large-Capacity Pump


The pump capacity has been increased. Large capacity pump deliver an optimal heat balance.



## Designed for the Environment and the Future!

### Automatic Acceleration/Deceleration Function Reduces Engine Speed

Engine speed is automatically reduced when the control lever is placed in neutral, effectively saving fuel and reducing noise and exhaust emissions. The engine quickly returns to full speed when the lever is moved out of neutral. The proportional Deceleration recovery speed smoothly.

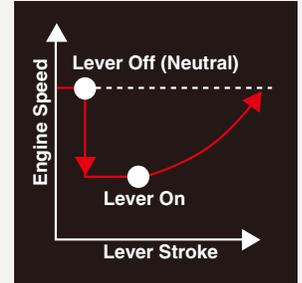

### Low Noise Level and Mild Sound Quality

The electronically controlled common-rail engine has a unique fuel injection system that runs quietly. Also, the hydraulic pumps have been redesigned to produce a more pleasant sound during pressure relief. In short, the SK series meets all requirements cited in latest standards.

### Meets EMC (Electromagnetic Compatibility) Standards in Europe.

Measures have been taken to ensure that the SK machines do not cause electro-magnetic interference.

Ventilation Openings for tropical temperatures



### Heavy Duty Upper Carbody and Side Frames

The structure of the lower portion of the upper frame has been reassessed and the undercover area has been minimized for further strength.



# “On the Ground” Maintenance!

## Comfortable “On the Ground” Maintenance



The machine layout was designed with easy inspection and maintenance in mind.

### Access through the right side cover


A new fuel filter has been installed that can handle the most punishing conditions. Double pre-fuel filters with built-in water separator and high-grade main fuel filter.



Main fuel filter  
Pre-fuel filter  
(with built-in water separators)  
Engine Oil Filter



Main fuel filter

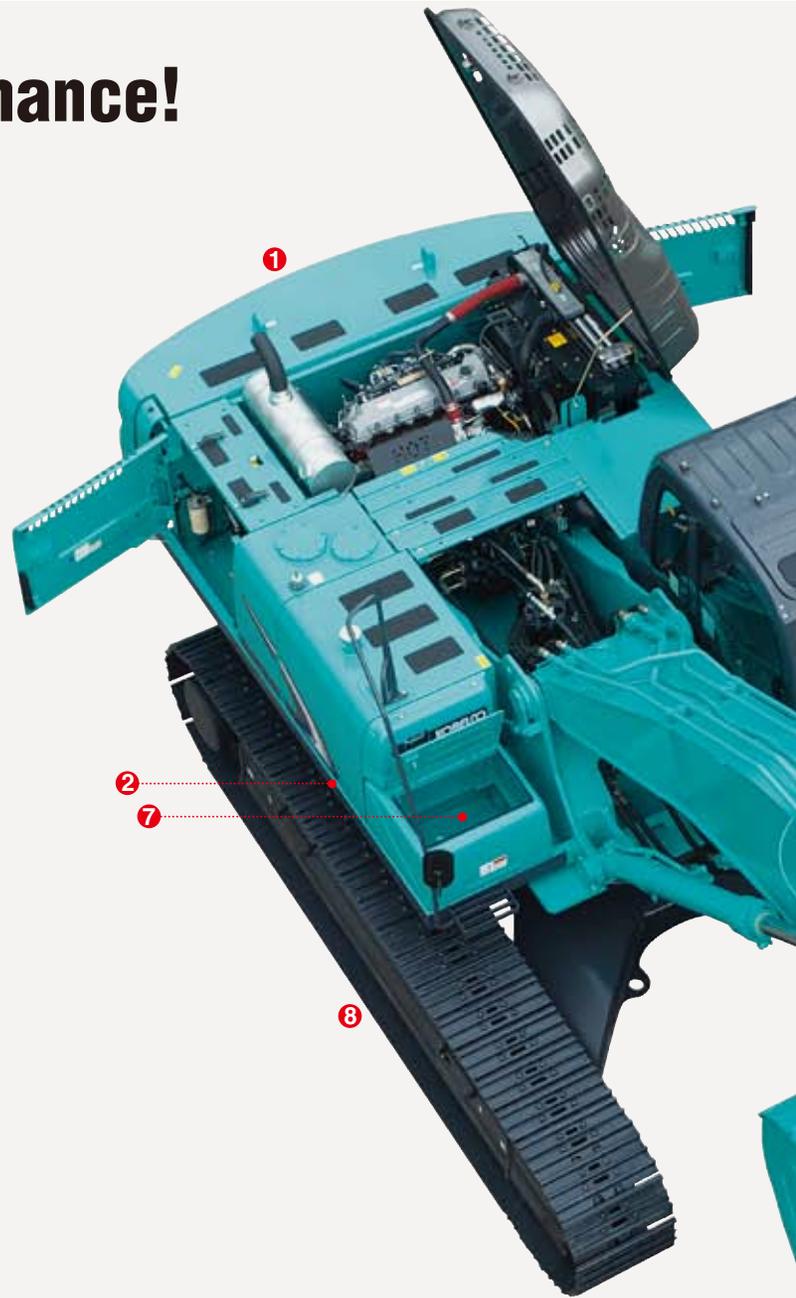

## Quick Oil Drain Valves for Quick Maintenance



Quick drain valve


1 A quick drain valve, which requires no tools, is provided as standard equipment.



Fuel drain valve

2 To facilitate fuel tank cleaning, the fuel drain valve fitted with a flange on the bottom.

## More Efficient Maintenance Inside the Cab



3 Detachable two-piece floor mat with handles for easy removal. A floor drain is located under the mat.



4 Easy-access fuse box differentiated fuses, easy to locate malfunctions.



5 Air conditioner filter can be easily removed without tools for cleaning.



6 Hour meter can be checked while standing on the ground.




7 Large-capacity tool box can hold up to three pails.



8 Special crawler frame design is easily cleaned of mud.

Access through the left side cover

## Parallel Cooling Units Are Easy to Clean

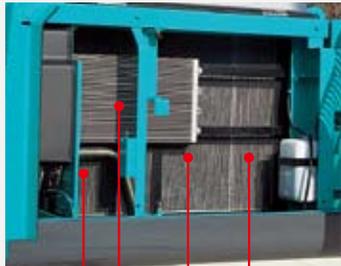

Oil cooler      Radiator  
Air conditioner condenser      Intercooler

## Highly Durable Super-fine Filter



● Super-fine filter

The high-capacity hydraulic oil filter incorporates glass fiber with superior cleaning power and durability. With a replacement cycle of 1,000 hours and a construction that allows replacement of the filter element only, it's both highly effective and highly economical.

## Double-Element Air Cleaner as Standard



The large-capacity element features a double-filter structure that keeps the engine running clean even in dusty environments.


Air cleaner (double element)

## Monitor Display with Essential Information for Accurate Maintenance Checks



- Displays only the maintenance information that's needed, when it's needed.
- Self-diagnostic function that provides early-warning detection and display of electrical system malfunctions.
- Record previous breakdowns, including irregular and transient malfunctions.

## Choice of 16 Languages for Monitor Display



With messages including those requiring urgent action displayed in the local language, users in all parts of the world can work with greater peace of mind.

☹️ 充電不良	☹️ Lichtmaschine defekt	☹️ CHARGE ERROR	☹️ CHARGE ERROR
Chinese	German	English	English (US)
☹️ ERREUR DE CHARGE	☹️ PENGISIAN BATT. RUSAK	☹️	☹️ ERRORE DI CARICA
French	Indonesian	ISO	Italian
☹️ チャージ	☹️ KESALAHAN CAS	☹️ ചാർജ്ജ്	☹️ ERRO DE CARGA
Japanese	Malay	Myanmar(Bruese)	Portuguese
☹️ ERROR EN CARGA	☹️ தவறாக திணிததல்	☹️ ၂၅၂၅၂၅	☹️ Sac Bìen Bì Lỗi
Spanish	Tamil	Thai	Vietnamese

# Designed from the Operator's Point of View

## Wide Field of View Liberates the Operator

The front field of view easily clears ISO standards, while the peripheral view reduces blind spots to a minimum.



- A long wiper covers a wide area for a broad view in bad weather.
- Back mirrors provide a safe view of the rear.
- Tempered glass windows.

## Wide-Access Cab Ensures Smooth Entry and Exit

The left control box and safety lock lever together rise through 54° to give wider cab access and easier entry and exit.



## Plenty of Foot Room

Front-to-back room in the cab is a comfortable 750 mm. Big travel pedal for operator comfort.

## Low Vibration for Fatigue-Free Operation

The rigid cab construction and liquid-filled viscous cab mounts minimize cab vibration. In addition, the use of new lower rollers on the crawlers cuts travel vibration in half compared with previous models.

## Creating a Comfortable Operating Environment



- Seat can be reclined to almost horizontal position

## Newly Designed Information Display Prioritizes Visual Recognition

The analog gauge provides information that's easy to read regardless of the operating environment. Big screen to display information with an attached visor to further enhance visibility.



## Imagining Possible Scenarios and Preparing in Advance

### Bracket for Attaching a Head Guard Provided as Standard Equipment



A bracket is provided as standard equipment that allows the optional head guard to be simply bolted on.

### Safety Features That Take Various Scenarios into Consideration



- Firewall separates the pump compartment from the engine



- Hammer for emergency exit



- Swing flashers/rear working lights

- Thermal guard prevents contact with hot components during engine inspections
- Retractable seatbelt requires no manual adjustment

### Other Features



- Double slide and suspension seat



- Powerful automatic air conditioner



- Spacious luggage tray



- One-touch lock release simplifies opening and closing the front window



- Large cup holder

- Interior design and materials create an elegant feel



- Two cab working lights (Optional)



- Adjustable suspension seat



## Engine

Model	HINO J08E
Type	Direct injection, water-cooled, 4-cycle diesel engine with turbocharger, intercooler
No. of cylinders:	6
Bore and stroke:	112 mm X 130 mm
Displacement:	7.684 L
Rated power output:	280 HP/2,100 rpm (ISO14396)
Max. torque:	998 N·m/1,600 min <sup>-1</sup> (ISO14396:2002) 969 N·m/1,600 min <sup>-1</sup> (ISO9249:2007)



## Hydraulic System

Pump	
Type:	Two variable displacement pumps + 1 gear pump
Max. discharge flow:	2 X 294 L/min, 1 X 20 L/min
Relief valve setting	
Boom, arm and bucket:	34.3 MPa {350 kgf/cm <sup>2</sup> }
Power Boost:	37.8 MPa {385 kgf/cm <sup>2</sup> }
Travel circuit:	34.3 MPa {350 kgf/cm <sup>2</sup> }
Swing circuit:	29.0 MPa {296 kgf/cm <sup>2</sup> }
Control circuit:	5.0 MPa {50 kgf/cm <sup>2</sup> }
Pilot control pump:	Gear type
Main control valves:	8-spool
Oil cooler:	Air cooled type



## Swing System

Swing motor:	Axial-piston motor
Brake:	Hydraulic; locking automatically when the swing control lever is in the neutral position
Parking brake:	Hydraulic disc brake
Swing speed:	10.0 min <sup>-1</sup> {rpm}
Tail swing radius:	3,500 mm
Min. front swing radius:	4,370 mm



## Attachments

Backhoe bucket and arm combination

Use	Backhoe bucket			
	Heavy digging	Normal digging		
Bucket capacity	ISO heaped m <sup>3</sup>	1.4	1.6	2.3
	Struck m <sup>3</sup>	1.0	1.2	1.84
Opening width	With side cutter mm	1,390	1,570	1,930
	Without side cutter mm	1,330	1,450	1,760
No. of teeth		5	5	6
Bucket weight	kg	1,300	1,100	1,500
Combination	2.25 m super short arm	○	○	○
	2.6 m short arm	○	○	×
	3.3 m standard arm	○	○	×

○ Recommended □ Not recommended



## Travel System

Travel motors:	2 X axial-piston, two-step motors
Travel brakes:	Hydraulic brake per motor
Parking brakes	Oil disc brake per motor
Travel shoes:	48 each side
Travel speed:	5.6/3.3 km/h
Drawbar pulling force:	322 kN {32.8 tf} (ISO7464)
Gradeability:	70 % {35°}
Ground clearance:	500 mm



## Cab & Control

Cab	
All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat.	
Control	
Two hand levers and two foot pedals for travel	
Two hand levers for excavating and swing	
Electric rotary-type engine throttle	



## Boom, Arm & Bucket

Boom cylinders:	140 mm X 1,550 mm
Arm cylinder:	170 mm X 1,788 mm
Bucket cylinder:	150 mm X 1,193 mm



## Refilling Capacities & Lubrications

Fuel tank:	580 L
Cooling system:	31.1 L
Engine oil:	28.5 L
Travel reduction gear:	2 X 9.5 L
Swing reduction gear:	7.4 L
Hydraulic oil tank:	280 L tank oil level 353 L hydraulic system



## Working Ranges

Unit: m

Range	Boom Arm	6.5 m		
		Super Short 2.25 m	Short 2.6 m	Standard 3.3 m
a- Max. digging reach		10.35	10.61	11.26
b- Max. digging reach at ground level		10.14	10.40	11.06
c- Max. digging depth		6.51	6.86	7.56
d- Max. digging height		10.28	10.26	10.58
e- Max. dumping clearance		7.05	7.06	7.37
f- Min. dumping clearance		3.73	3.32	2.62
g- Max. vertical wall digging depth		4.32	5.84	6.61
h- Min. swing radius		4.48	4.45	4.37
i- Horizontal digging stroke at ground level		3.39	4.21	5.82
j- Digging depth for 2.4 m (8') flat bottom		6.31	6.67	7.4
Bucket capacity SAE heaped m <sup>3</sup>		2.3	1.6	1.4

Unit: kN (tf)


Arm length	Super Short 2.25 m	Short 2.6 m	Standard 3.3 m
Bucket digging force	220 241*	221 (22.5) 244 (24.9)*	221 (22.5) 244 (24.9)*
Arm crowding force	231 255*	205 (20.9) 225 (22.9)*	165 (16.8) 181 (18.5)

\*Power Boost engaged.



## Dimensions

Arm length	Short 2.6 m	Standard 3.3 m
A Overall length	11,280	11,200
B Overall height (to top of boom)	3,640	3,420
C Overall width with 600 mm shoe	3,200	3,200
D Overall height (to top of cab)	3,160	3,160
E Ground clearance of rear end*	1,190	1,190
F Ground clearance*	500	500

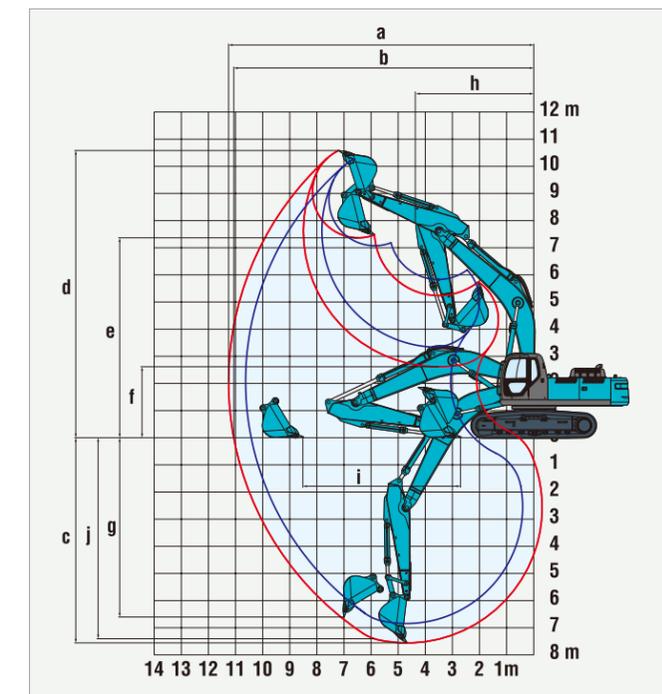


— Short Arm  
— Standard Arm

Unit: mm

G Tail swing radius	3,500
G' Distance from center of swing to rear end	3,500
H Tumbler distance	4,050
I Overall length of crawler	4,980
J Track gauge	2,600
K Shoe width	600/800
L Overall width of upperstructure	2,950

\* Without including height of shoe lug.

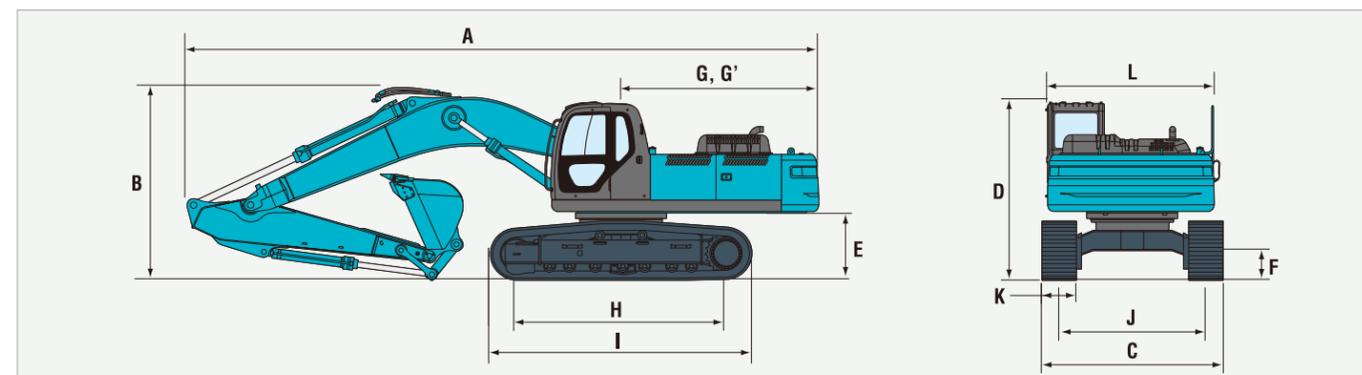

## Operating Weight & Ground Pressure

In standard trim, with standard boom, 3.3 m arm, and 1.4 m<sup>3</sup> ISO heaped bucket

Shaped		Triple grouser shoes (even height)	
		600	800
Shoe width	mm		
Overall width	mm	3,200	3,400
Ground pressure	kPa (kgf/cm <sup>2</sup> )	67 (0.68)	52 (0.53)
Operating weight	kg	35,700	36,800



## Working Ranges

Unit: m


Range	Boom		7.0 m	
	ME	Short	Standard	
	2.4 m	3.0 m	3.45 m	
a- Max. digging reach	10.88	11.77	12.07	
b- Max. digging reach at ground level	10.63	11.54	11.84	
c- Max. digging depth	6.48	7.36	7.81	
d- Max. digging height	10.49	11.16	10.93	
e- Max. dumping clearance	6.91	7.72	7.58	
f- Min. dumping clearance	3.11	3.22	2.77	
g- Max. vertical wall digging depth	4.00	6.68	7.12	
h- Min. swing radius	4.75	5.27	5.14	
i- Horizontal digging stroke at ground level	3.59	5.21	6.10	
j- Digging depth for 2.4 m (8') flat bottom	6.31	7.21	7.67	
Bucket capacity SAE heaped m <sup>3</sup>	3.4	2.1	1.9	

## Digging Force (ISO 6015)

Unit: kN (tf)

Arm length	ME	Short	Standard
	2.4 m	3.0 m	3.45 m
Bucket digging force	279 (28.0) 305 (31.1)*	266 (27.1) 291 (29.7)*	267 (27.2) 292 (29.8)*
Arm crowding force	247 (25.2) 270 (27.5)*	223 (22.8) 244 (24.9)*	203 (20.7) 222 (22.7)*

\*Power Boost engaged.

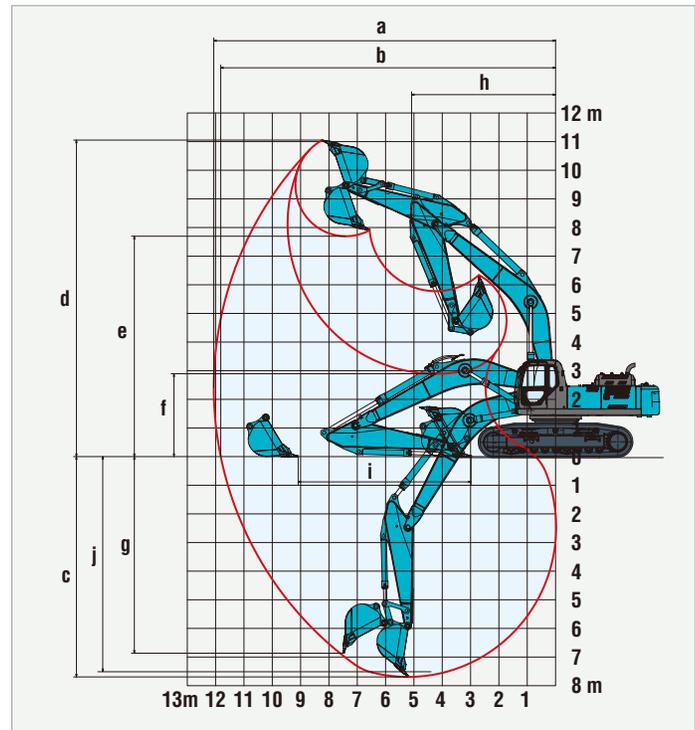

— Standard Arm




## Dimensions

Arm length	Boom		7.0 m	
	ME	Short	Standard	
	2.4 m	3.0 m	3.45 m	
A Overall length	11,620	12,080	12,030	
B Overall height (to top of boom)	4,260	3,800	3,570	
C Overall width (600 mm shoes)	3,350/3,550/3,650			
D Overall height (to top of cab)	3,310			
E Ground clearance of rear end*	1,340			

Unit: mm

F Ground clearance*	510
G Tail swing radius	3,670
G' Distance from center of swing to rear end	3,670
H Tumbler distance	4,400
I Overall length of crawler	5,450
J Track gauge	2,750
K Shoe width	600/800/900
L Overall width of upperstructure	3,000

\* Without including height of shoe lug.


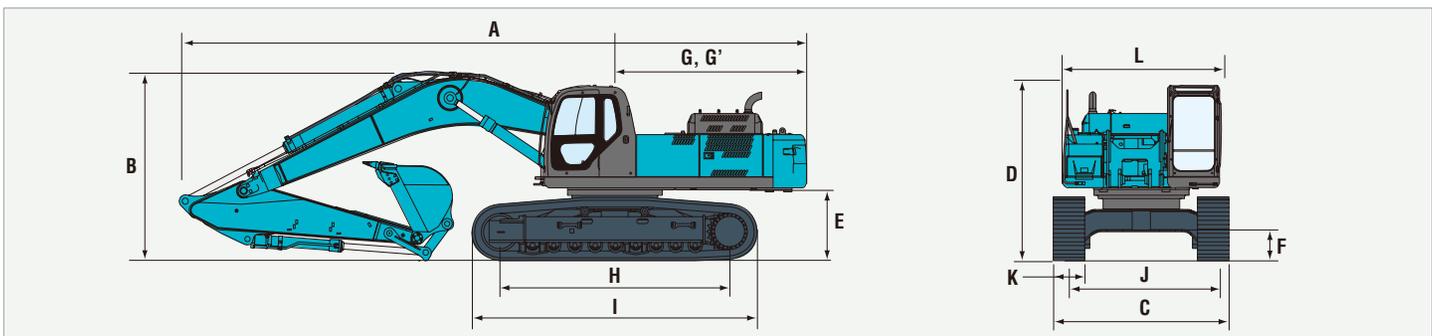


## Operating Weight & Ground Pressure

In standard trim, with standard boom, 3.45 m arm, and 1.9 m<sup>3</sup> ISO heaped bucket

Shaped		Triple grouser shoes (even height)		
		600	800	900
Shoe width	mm	600	800	900
Overall width	mm	3,350	3,550	3,650
Ground pressure	kPa (kg/cm <sup>2</sup> )	83 (0.84)	64 (0.65)	58 (0.59)
Operating weight	kg	48,300	49,800	50,300

# Lifting Capacities

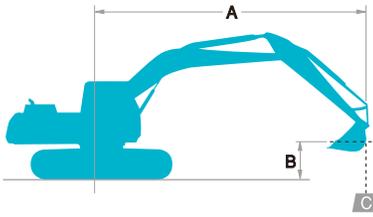

A - Reach from swing centerline to bucket hook

B - Bucket hook height above/below ground

C - Lifting capacities in kilograms

• Max. discharge pressure: 37.8 MPa (385 kgf/cm<sup>2</sup>)

SK350LC		Super Short Arm: 2.25 m, Bucket: 2.3 m <sup>3</sup> SAE heaped 1,500kg Shoe: 800 mm HEAVY LIFT										
		3.0m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
B	A											
7.5 m	kg									*7,640	*7,640	6.94 m
6.0 m	kg					*8,310	*8,310	*7,580	6,890	*7,510	6,250	7.90 m
4.5 m	kg			*12,290	*12,290	*9,440	*9,440	*8,040	6,650	*7,550	5,340	8.48 m
3.0 m	kg			*15,180	13,720	*10,770	8,970	*8,690	6,340	*7,710	4,870	8.77 m
1.5 m	kg			*16,850	12,820	*11,850	8,440	*9,280	6,050	7,730	4,700	8.80 m
G.L.	kg			*17,000	12,570	*12,350	8,150	*9,580	5,860	7,970	4,810	8.57 m
-1.5 m	kg	*17,660	*17,660	*16,220	12,610	*12,140	8,080	*9,370	5,820	*8,520	5,270	8.05 m
-3.0 m	kg	*18,950	*18,950	*14,520	12,860	*11,040	8,210			*8,760	6,350	7.18 m
-4.5 m	kg	*14,490	*14,490	*11,350	*11,350					*8,620	*8,620	5.81 m

SK350LC		Short Arm: 2.6 m, Bucket: 1.6 m <sup>3</sup> SAE heaped 1,100 kg Shoe: 800 mm HEAVY LIFT										
		3.0m		4.5 m		6.0 m		7.5 m		At Max. Reach		Radius
B	A											
7.5 m	kg									*7,420	*7,420	7.15 m
6.0 m	kg							*7,460	7,140	*7,360	6,230	8.08 m
4.5 m	kg			*11,850	*11,850	*9,280	*9,280	*7,980	6,880	*7,450	5,360	8.66 m
3.0 m	kg			*14,830	14,180	*10,680	9,250	*8,690	6,550	*7,630	4,910	8.94 m
1.5 m	kg			*16,820	13,180	*11,870	8,690	*9,340	6,250	7,690	4,740	8.97 m
G.L.	kg			*17,310	12,810	*12,500	8,360	*9,730	6,040	7,880	4,830	8.74 m
-1.5 m	kg	*18,490	*18,490	*16,750	12,790	*12,450	8,240	*9,650	5,970	*8,580	5,240	8.23 m
-3.0 m	kg	*20,520	*20,520	*15,260	12,980	*11,550	8,330			*8,940	6,200	7.38 m
-4.5 m	kg	*16,250	*16,250	*12,420	*12,420	*9,210	8,660			*9,090	8,540	6.06 m

SK350LC		Standard Arm: 3.3 m, Bucket: 1.4 m <sup>3</sup> SAE heaped 1,300 kg Shoe: 800 mm HEAVY LIFT														
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At Max. Reach		Radius
B	A															
7.5 m	kg									*6,170	*6,170			*3,970	*3,970	8.05 m
6.0 m	kg									*6,480	*6,480			*3,910	*3,910	8.88 m
4.5 m	kg							*8,130	*8,130	*7,090	6,850	*6,400	4,900	*4,020	*4,020	9.41 m
3.0 m	kg			*13,760	*13,760	*13,080	*13,080	*9,630	9,310	*7,890	6,480	*6,900	4,720	*4,280	4,120	9.67 m
1.5 m	kg			*7,730	*7,730	*15,620	13,340	*11,020	8,660	*8,680	6,130	*7,310	4,530	*4,730	3,970	9.70 m
G.L.	kg			*11,370	*11,370	*16,830	12,690	*11,950	8,220	*9,260	5,860	7,310	4,380	*5,450	4,030	9.49 m
-1.5 m	kg	*11,780	*11,780	*16,310	*16,310	*16,870	12,480	*12,250	8,000	*9,450	5,710	*6,980	4,320	*6,660	4,310	9.02 m
-3.0 m	kg	*16,640	*16,640	*22,270	*22,270	*15,930	12,550	*11,790	7,990	*9,030	5,710			*7,860	4,970	8.26 m
-4.5 m	kg	*22,140	*22,140	*19,150	*19,150	*13,820	12,860	*10,300	8,180					*8,180	6,400	7.10 m
-6.0 m	kg					*9,700	*9,700							*8,040	*8,040	5.29 m

- Notes:**
- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
  - Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
  - Bucket lift hook defined as lift point.
  - The above lifting capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Lifting capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
  - Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
  - Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

